

DESIGN DATA				
Traffic	Average Daily			Max.Hr.
Current --	Pass: --	Trucks: -	Total: <750	-
Forecast -	Pass: -	Trucks: -	Total: -	-
Clear Zone Distance: 60'	Design Speed: 55 MPH			
Minimum Sight Dist. for Stopping: -				
Minimum Sight Dist. for Safe Passing: -				
Sight Dist. for No Passing Zone: -				

JOB #3

STATE	PROJECT NO.	PCN	SECTION NO.	SHEET NO.
ND	SC-2511(065)	21366	1	1

McHENRY COUNTY NORTH DAKOTA



FEDERAL AID PROJECT
SC-2511(065)

BITUMINOUS SEAL COAT


An Existing Paved County Road From the Intersection of US Hwy 2
Thence North 10.2 Miles

GOVERNING SPECIFICATIONS:
2014 Standard Specifications adopted by the NDDOT and the Supplemental Specifications effective on the date the project is advertised.

PROJECT NUMBER	DESCRIPTION	GROSS MILES	NET MILES
SC-2511(065)	BITUMINOUS SEAL COAT	10.224	10.224

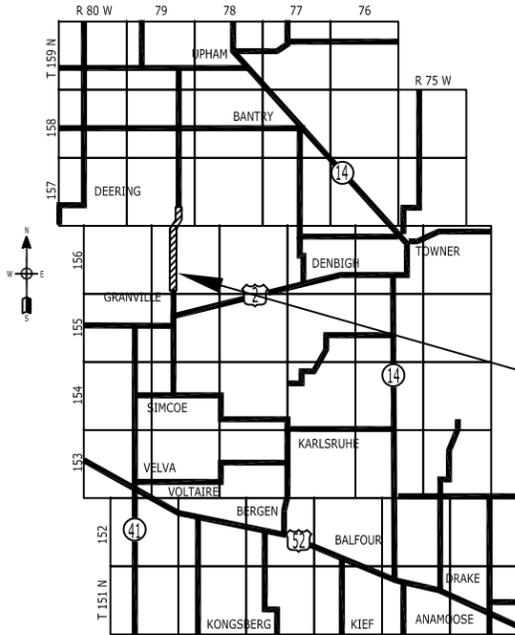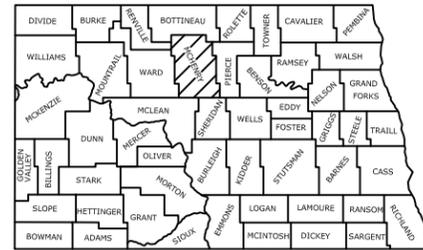

SKETCH MAP OF McHENRY COUNTY

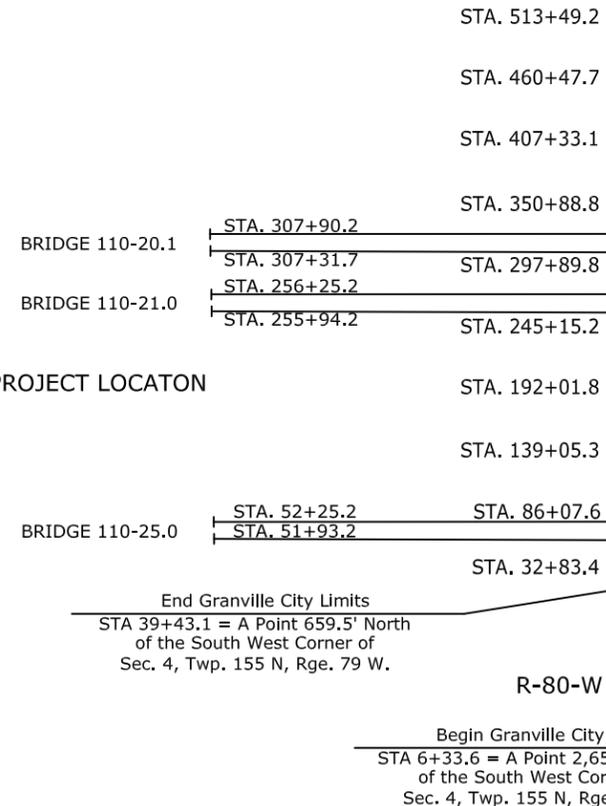

End Project SC-2511(065)
STA: 539+82.2 = A Point 2,633.0' North
of the South West Corner of
Sec. 23, Twp. 157 N, Rge. 79 W.

Begin Project SC-2511(065)
STA 0+00.0 = A Point 3,098.8' South
and 126.0' East of the South West Corner of
Sec. 4, Twp. 155 N, Rge. 79 W.

End Granville City Limits
STA 39+43.1 = A Point 659.5' North
of the South West Corner of
Sec. 4, Twp. 155 N, Rge. 79 W.

Begin Granville City Limits
STA 6+33.6 = A Point 2,650.0' South
of the South West Corner of
Sec. 4, Twp. 155 N, Rge. 79 W.

DESIGNERS

Jason I. Mayfield, PE

Kent D. Indvik, PE

Jaci Brutcher



Consulting Engineers & Land Surveyors
915 East 11th Street ~ PO Box 237 ~ Bottineau, ND 58318
316 Eastdale Drive ~ PO Box 1277 ~ Bismarck, ND 58502
110 8th Avenue Southwest ~ Minot, ND 58701

I hereby certify that the attached plans were prepared by me or under my direct supervision and that I am a duly registered professional engineer under the laws of the state of ND.

APPROVED DATE 01/05/2016

Jason I Mayfield

Wold Engineering, P.C.

This document was originally issued and sealed by Jason I. Mayfield, Registration Number PE-7877, on 01/05/2016 and the original document is stored at Wold Engineering, P.C. Minot

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	2	1

TABLE OF CONTENTS

<u>Section No.</u>	<u>Sheet No.</u>	<u>Description</u>
1	1	Title Sheet
2	1	Table of Contents
6	1	Notes
8	1	Estimate of Quantities
10	1	Basis of Estimate
30	1	Typical Sections
100	1	Traffic Control Devices List
	2	Sign Placement Layout

LIST OF STANDARD DRAWINGS

<u>Standard No.</u>	<u>Description</u>
D101-1,2,3	NDDOT Abbreviations
D101-10	NDDOT Utility Company Abbreviations
D101-20,21	Linestyles
D101-30,31,32	Symbols
D-704-3	Lane Markers (Spotting Tab, Seal Jobs Only)
D-704-7, 8	Breakaway Systems for Construction Zone Signs
D-704-9,10, 11	Construction Sign Details
D-704-12	Shoulder Closure Tapers
D-704-13	Barricade and Channelizing Device Details
D-704-14	Construction Sign Punching and Mounting Details
D-704-15	Road Closure Layouts
D-704-20	Terminal and Seal Coat Sign Layouts
D-704-22	Construction Truck and Temporary Detour Layouts
D-704-26	Miscellaneous Sign Layouts
D-704-27	Traffic Control Plan for Moving Operations
D-762-1	Pavement Marking Message Details
D-762-4	Pavement Marking
D-762-6	Short-Term Pavement Marking

NOTES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	6	1

105-P01 HAUL ROADS: All roads off the state system will not be designated as haul roads. The Contractor will obtain approval from the local government agency in charge of local roads before using them as haul roads.

107-P01 RAILROAD PROTECTIVE LIABILITY INSURANCE: Project SC-2511(065) crosses the Burlington Northern Santa Fe Railway Company (BNSF) Railroad Right of Way at Station 32+42.6. The type of work that will be performed in the railroad right of way is a chip seal. Inquiries for protective liability insurance shall be directed to:

Ms. Lynn Leibfried
Manager Public Projects
BNSF Railway Company
80 44th Avenue NE
Minneapolis, MN 55421
763-782-3492 – O
Lynn.leibfried@bnsf.com

Information on crossing number 093053E may be obtained from the Federal Railroad Administration website: <http://safetydata.fra.dot.gov/Officeofsafety/>.

420-P01 SEAL COAT APPLICATION: Place the Seal Coat using the following stages:

- 1) The application rate for CRS-2P Emulsified Asphalt and Cover Coat Class 41 shall be as shown in the Basis of Estimate, or as otherwise directed by the Engineer.
- 2) The cover coat aggregate shall be spread immediately following the application of bituminous material. Under no circumstances shall the seal coat operations proceed if the bituminous material remains uncovered for more than one minute.
- 3) Initial light brooming shall be during the cool period of the early morning of the next day after seal application. Traffic control is required during the brooming operation.
- 4) Lanes must be pulled even at the end of the day. Posted speed limit in area of unbroomed chips will remain at speed limit 45.
- 5) The roadway shall be broomed again prior to the Fog Coat application. A Fog Coat application of CSS-1H will follow at the undiluted rate as shown in the Basis of Estimate, or as otherwise directed by the Engineer. The dilution rate of the Fog Coat will be 50% (water) and 50% (CSS-1H). Dilution at the supplier will be required. This work will be performed within 48 hours of the initial brooming.
- 6) If needed, a final brooming shall take place no later than 5 days after mainline seal work is complete to remove all excess cover coat material on mainline and shoulders.
- 7) The maintenance period will end 5 days after the application of the Fog Coat.
- 8) Blotter material needed to correct bleeding will be paid for using the PS-1 schedule. Application shall be approved by the Engineer.

420-P02 CLASS 41 COVER COAT: Class 41 cover coat material shall be paid for actual quantity used up to plan quantity unless otherwise directed by the Engineer. Any excess chips along the shoulder or approaches after the final brooming shall be removed by the Contractor.

420-P02 URBAN SECTION: A pick up broom shall be used for the final brooming prior to applying the fog coat. Excess cover coat material shall be picked up and removed from the project. The Costs associated with brooming and disposal of the cover coat material shall be incidental to the Bid Item "Cover Coat Material CL 41".

704-P01 TRAFFIC CONTROL FOR SEAL COATS: Traffic control for the seal coat shall consist of a temporary road closure, flagging and a pilot car. Traffic control devices shall comply with the following Standard Drawings:

1. Standard D-704-15, Layout A: For temporary roadway closures just beyond the daily work areas during seal coat operations. Intermediate flagging stations will require signs W20-7a-48 only.
2. Standard D-704-20, Layout H: For construction signing during seal coat operations.
3. Standard D-704-22, Layouts K and L: For trucks hauling material.
4. Standard Drawings D-704-7, 8, 9, 10, 11, 12, 13, and 14 are applicable.
5. Standard D-704-3, Lane Markers for Seal Jobs (Spotting Tabs)

Quantities are based on a 6 mile limitation for the sealing operations. Pilot car operations may not exceed 6 miles. The required traffic control signs and devices are included in the Traffic Control Devices List and will be measured and paid for at the contract unit price for each device.

704-P02 CONSTRUCTION SIGNING: The Contractor shall furnish the necessary signing as shown on the Standard Drawings, "Construction Sign and Barricade Location Details: under Type A, G, H, K, L, BB, CC, and EE as per Standard Drawings D-704-15, 20, 22 & 26 as required by the Contractor's operations.

762-P01 PAVEMENT MARKING: The short term application shall be applied immediately following final brooming for the entire project. The permanent application shall be no sooner than two weeks following the short term application.



This document was originally issued and sealed by Jason I. Mayfield, Registration Number PE-7877, on 1/05/16 and the original document is stored at the Wold Engineering, P.C. Minot

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	8	1

ESTIMATE OF QUANTITIES

SPEC	CODE	DESCRIPTION	UNIT	MAINLINE	APPROACHES	TOTAL
103	0100	CONTRACT BOND	L SUM	1		1
107	0100	RAILWAY PROTECTION INSURANCE	L SUM	1		1
401	0070	FOG SEAL	GAL	7434		7434
420	0111	CRS2P EMULSIFIED ASPHALT	GAL	79275	1494	80769
420	0125	COVER COAT MATERIAL CL 41	TON	1859	83	1942
702	0100	MOBILIZATION	L SUM	1		1
704	1000	TRAFFIC CONTROL SIGNS	UNIT	1060		1060
704	1052	TYPE III BARRICADE	EA	4		4
762	0103	PAVEMENT MARKING PAINTED-MESSAGE	SF	265		265
762	0405	SHORT TERM 4IN BROKEN LINE-PNT TAPE OR RSD MRK	LF	12455		12455
762	0410	SHORT TERM 4IN LINE NPZ-PN TP OR RS MRK	LF	11140		11140
762	1104	PVMT MK PAINTED 4IN LINE	LF	23595		23595



This document was originally issued and sealed by Jason I. Mayfield, Registration Number PE-7877, on 01/05/2016, and the original document is stored at Wold Engineering, P.C. Minot

ESTIMATE OF QUANTITIES

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	10	1

BASIS OF ESTIMATE - ROADWAY

DESCRIPTION	UNIT	WIDTH	QUANTITY PER MILE
STA 0+00 TO 18+05 & 28+ 19 TO 539+82 (10.032 MILES)			
EMULSIFIED ASPHALT FOR SEAL COAT AT 0.42 GAL/SY (CRS-2P)	GAL	30'	7392
COVER COAT MATERIAL AT 25 LBS/SY (CL. 41)	TON	24'	176
EMULSIFIED ASPHALT FOR FOG SEAL AT 0.05 GAL/SY (SS-1H OR CSS-1H OR MS-1)	GAL	24'	704
STA 18+05 TO 28+ 19 (0.192 MILES)			
EMULSIFIED ASPHALT FOR SEAL COAT AT 0.42 GAL/SY (CRS-2P)	GAL	66'	16263
COVER COAT MATERIAL AT 25 LBS/SY (CL. 41)	TON	66'	484
EMULSIFIED ASPHALT FOR FOG SEAL AT 0.05 GAL/SY (SS-1H OR CSS-1H OR MS-1)	GAL	66'	1936

BASIS OF ESTIMATE - MARKING

PAVEMENT MARKING PAINTED LINE (SHORT TERM AND PERM.)
CENTERLINE -- 4" YELLOW, 10 FT. LINES, 30 FT. SKIP 1,320 LF/MILE
BARRIER LINES -- 4" YELLOW, 4" BETWEEN LINES
PAINTED MESSAGE RAILWAY CROSSING
BARRIER LINES
STA. 0+00 TO 32+20 LT - 3220 LF
STA. 0+00 TO 32+20 RT - 3220 LF
STA. 33+20 TO 40+60 LT - 740 LF
STA. 50+77 TO 58+57 RT - 780 LF
STA. 58+27 TO 66+07 LT - 780 LF
STA. 254+77 TO 262+57 RT - 780 LF
STA. 306+04 TO 314+14 RT - 810 LF
STA. 313+54 TO 321+64 LT - 810 LF
TOTAL - 11140 LF

BASIS OF ESTIMATE - APPROACHES


DESCRIPTION	UNIT	SEC LINE	PRIV DR	FIELD APP
SC-1249(063) APPROACHES	EA	20	8	35
CRS-2P EMULSIFIED ASPHALT	GAL	36	18	18
CL 41 COVER COAT	TON	2	1	1



This document was originally issued and sealed by Jason I. Mayfield, Registration Number PE-7877, on 01/05/2016 and the original document is stored at Wold Engineering, P.C. Minot


BASIS OF ESTIMATE

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	30	1

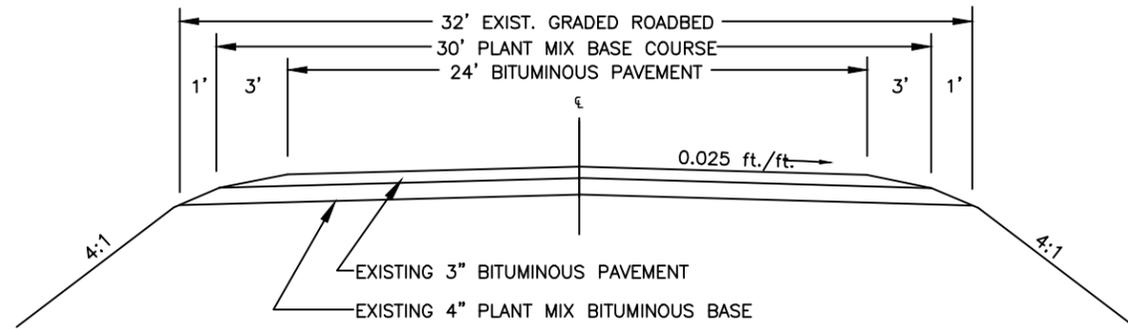


EXISTING TYPICAL SECTION

STA. 0+00 TO 18+05
STA. 28+19 TO 531+33

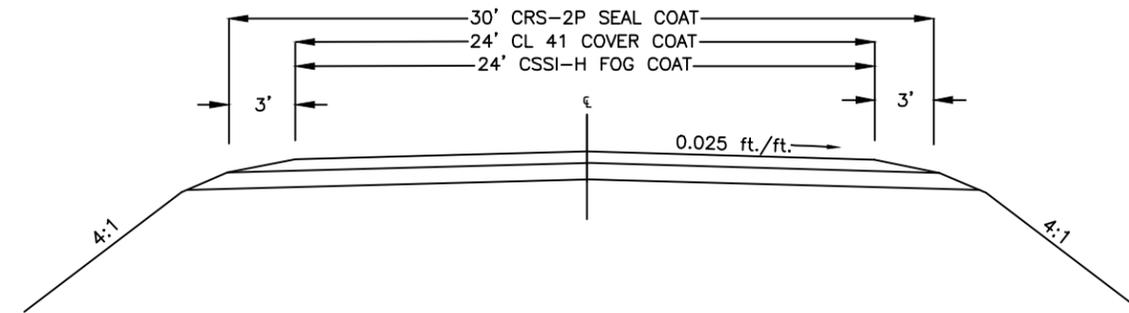


PROPOSED TYPICAL SECTION

STA. 0+00 TO 18+05
STA. 28+19 TO 531+33

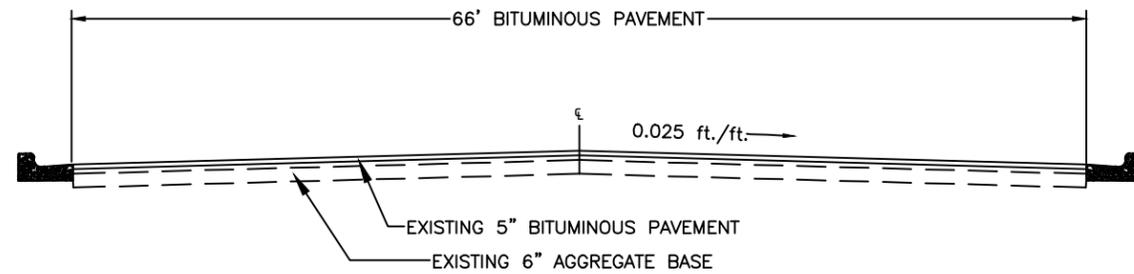

EXISTING TYPICAL SECTION

STA 18+05 TO 28+19

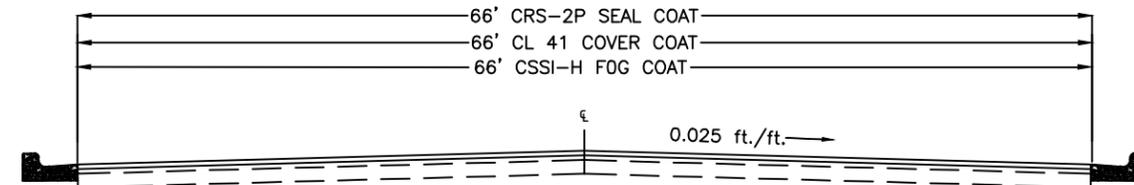

PROPOSED TYPICAL SECTION



STA 18+05 TO 28+19



This document was originally issued and seal by
JASON I. MAYFIELD
PE-7877
on 01-05-16 and the original document is stored at the
Wold Engineering, P.C.
Minot, North Dakota

TYPICAL SECTIONS

STATE	PROJECT NO.	SECTION NO.	SHEET NO.
ND	SC-2511(065)	100	2

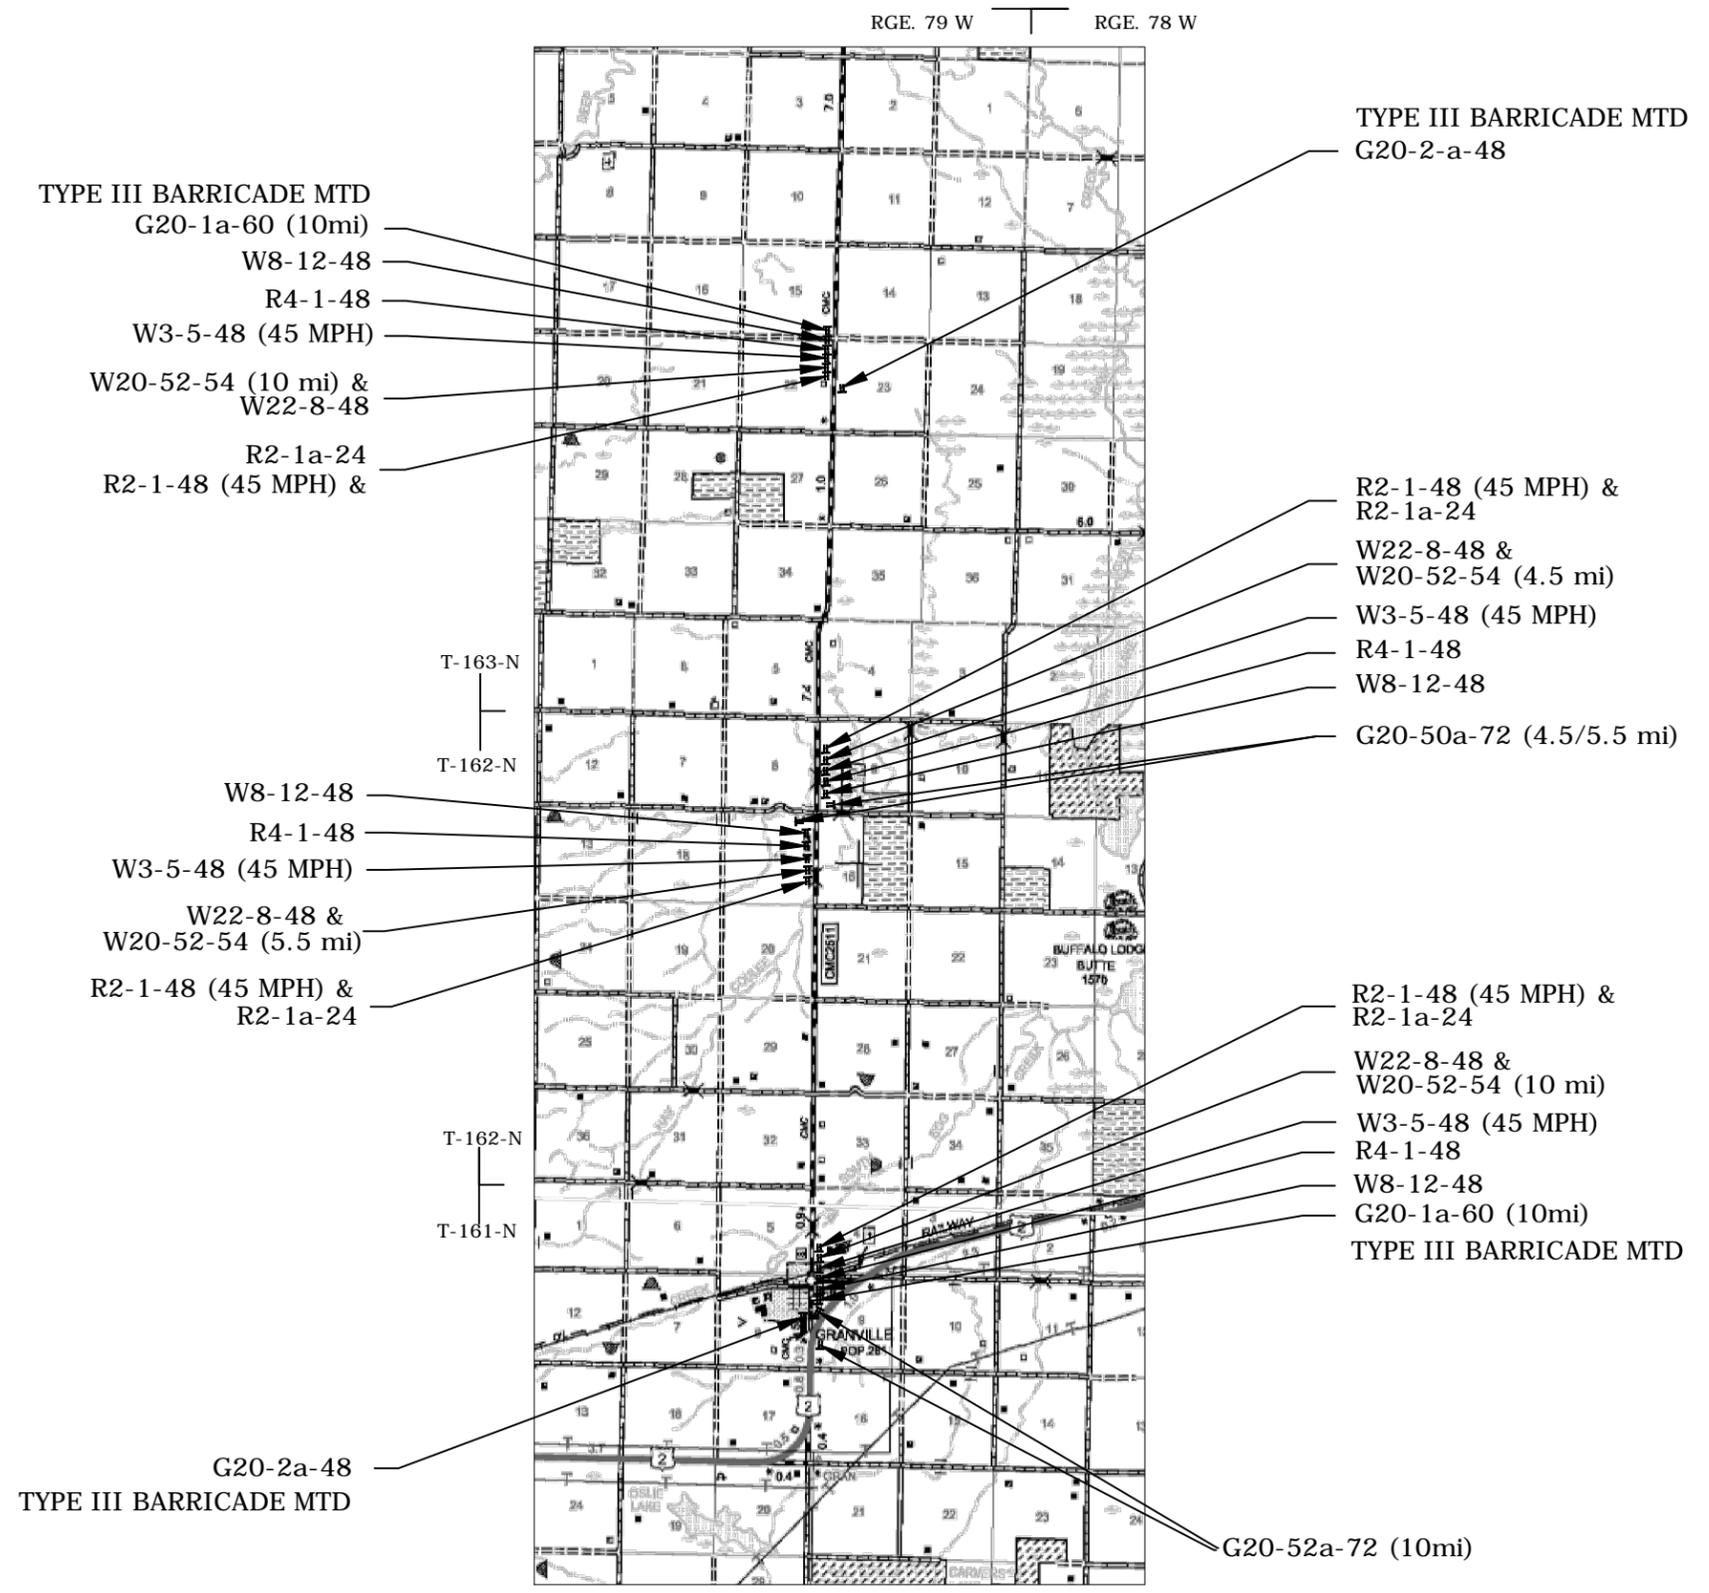

This document was originally issued and sealed by Jason I. Mayfield, Registration Number PE-7877, on 01/05/2016, and the original document is stored at Wold Engineering, P.C. Minot

SIGN PLACEMENT LAYOUT

NDDOT ABBREVIATIONS

D-101-1

? This is a special text character used in the labeling of existing features. It indicates a feature that has an unknown characteristic, potentially based on: lack of description, location accuracy or purpose.

Abn abandoned
 Abut abutment
 Ac acres
 Adj adjusted
 Aggr aggregate
 Ahd ahead
 ARV air release valve
 Align alignment
 Al alley
 Alt alternate
 Alum aluminum
 ADA Americans with Disabilities Act
 A ampere
 & and
 Appr approach
 Approx approximate
 ACP asbestos cement pipe
 Asph asphalt
 AC asphalt cement
 Assmd assumed
 @ at
 Atten attenuation
 ATR automatic traffic recorder
 Ave Avenue
 Avg average
 ADT average daily traffic
 Az azimuth
 Bk back
 BF back face
 Bs backsight
 Balc balcony
 B Wire barbed wire
 Barr barricade
 Btry battery
 Brg bearing
 BI beehive inlet
 Beg begin
 BM bench mark
 Bkwy bikeway
 Bit bituminous
 Blk block
 Bd Ft board feet
 BH bore hole
 BS both sides
 Bot bottom
 Blvd Boulevard
 Bndry boundary
 BC brass cap
 Brkwy breakaway
 Br bridge
 Bldg building

BV butterfly valve
 Byp bypass
 C Gdrl cable guardrail
 Calc calculate
 Cd candela
 CIP cast iron pipe
 CB catch basin
 CRS cationic rapid setting
 C Gd cattle guard
 C To C center to center
 Cl or C centerline
 Cm centimeter
 Ch chain
 Chnlk chain-link
 Ch Blk channel block
 Ch Ch channel change
 Chk check
 Chsld chiseled
 Cir circle
 Cl class
 Cl clay
 Cl F clay fill
 Cl Hvy clay heavy
 Cl Lm clay loam
 Clnt clean-out
 Clr clear
 Cl&gr clearing & grubbing
 Co S coal slack
 Comb. combination
 Coml commercial
 Compr compression
 CADD computer aided drafting & design
 Conc concrete
 Cond conductor
 Const construction
 Cont continuous
 CSB continuous split barrel sample
 Contr contraction
 Contr contractor
 CP control point
 Coord coordinate
 Cor corner
 Corr corrected
 CAES corrugated aluminum end section
 CAP corrugated aluminum pipe
 CMES corrugated metal end section
 CMP corrugated metal pipe
 CPVCP corrugated poly-vinyl chloride pipe
 CSES corrugated steel end section
 CSP corrugated steel pipe
 C coulomb
 Co County
 Crse course
 C Gr course gravel
 CS course sand

Ct Court
 Xarm cross arm
 Xbuck cross buck
 Xsec cross sections
 Xing crossing
 Xrd Crossroad
 Crn crown
 CF cubic feet
 M3 cubic meter
 M3/s cubic meters per second
 CY cubic yard
 Cy/mi cubic yards per mile
 Culv culvert
 C&G curb & gutter
 CI curb inlet
 CR curb ramp
 CS curve to spiral
 C cut
 Dd Ld dead load
 Defl deflection
 Defm deformed
 Deg or D degree
 DInt delineate
 DIntr delineator
 Depr depression
 Desc description
 Det detail
 DWP detectable warning panel
 Dtr detour
 Dia diameter
 Dir direction
 Dist distance
 DM disturbed material
 DB ditch block
 DG ditch grade
 Dbl double
 Dn down
 Dwg drawing
 Dr drive
 Drwy driveway
 DI drop inlet
 D dry density
 Ea each
 Esmt easement
 E East
 EB Eastbound
 Elast elastomeric
 EL electric locker
 E Mtr electric meter
 Elec electric/al
 EDM electronic distance meter
 Elev or El elevation
 Ellipt elliptical
 Emb embankment
 Emuls emulsion/emulsified

ES end section
 Engr engineer
 ESS environmental sensor station
 Eq equal
 Eq equation
 Evgr evergreen
 Exc excavation
 Exst existing
 Exp expansion
 Expy Expressway
 E external of curve
 Extru extruded
 FOS factor of safety
 F Fahrenheit
 FS far side
 F farad
 Fed Federal
 FP feed point
 Ft feet/foot
 Fn fence
 Fn P fence post
 FO fiber optic
 FB field book
 FD field drive
 F fill
 FAA fine aggregate angularity
 FS fine sand
 FH fire hydrant
 Fl flange
 Flrd flared
 FES flared end section
 F Bcn flashing beacon
 FA flight auger sample
 FL flow line
 Ftg footing
 FM force main
 Fs foresight
 Fnd found
 Fdn foundation
 Frac fractional
 Frwy freeway
 Frt front
 FF front face
 F Disp fuel dispenser

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-2

FFP	fuel filler pipes	IP	iron Pipe	M	mega	Ped	pedestrian
FLS	fuel leak sensor	Jt	joint	Mer	meridian	PPP	pedestrian pushbutton post
Furn	furnish/ed	J	joule	M	meter	Pen.	penetration
Gal	gallon	Jct	junction	M/s	meters per second	Perf	perforated
Galv	galvanized	K	kelvin	M	mid ordinate of curve	Per.	perimeter
Gar	garage	Kn	kilo newton	Mi	mile	PL	pipeline
Gs L	gas line	Kpa	kilo pascal	MM	mile marker	PI	place
G Reg	gas line regulator	Kg	kilogram	MP	mile post	P&P	plan & profile
GMV	gas main valve	Kg/m3	kilogram per cubic meter	MI	milliliter	PL	plastic limit
G Mtr	gas meter	Km	kilometer	Mm	millimeter	PI	plate
GSV	gas service valve	K	Kip(s)	Mm/hr	millimeters per hour	Pt	point
GVP	gas vent pipe	LS	Land Surveyor (licensed)	Min	minimum	PCC	point of compound curve
GV	gate valve	LSIT	Land Surveyor In Training	Misc	miscellaneous	PC	point of curve
Ga	gauge	Ln	lane	Mon	monument	PI	point of intersection
Geod	geodetic	Lg	large	Mnd	mound	PRC	point of reverse curvature
GIS	Geographical Information System	Lat	latitude	Mtbl	mountable	PT	point of tangent
G	giga	Lt	left	Mtd	mounted	POC	point on curve
GPS	Global Positioning System	L	length of curve	Mtg	mounting	POT	point on tangent
Gov	government	Lens	lenses	Mk	muck	PE	polyethylene
Grd	graded/grade	Lvl	level	Mun	municipal	PVC	polyvinyl chloride
Gr	gravel	LB	level book	N	nano	PCC	Portland Cement concrete
Grnd	ground	LvIng	leveling	NGS	National Geodetic Survey	Lb or #	pounds
GWM	ground water monitor	Lht	light	NS	near side	PP	power pole
Gdrl	guardrail	LP	light pole	Neop	neoprene	Preempt	preemption
Gtr	gutter	Ltg	lighting	Ntwk	network	Prefab	prefabricated
H Plg	H piling	Lig Co	lignite coal	N	newton	Prfmd	performed
Hdwl	headwall	Lig Sl	lignite slack	N	North	Prep	preparation
Ha	hectare	LF	linear foot	NE	North East	Press.	pressure
Ht	height	Liq	liquid	NW	North West	PRV	pressure relief valve
HI	height of instrument	LL	liquid limit	NB	Northbound	Prestr	prestressed
Hel	helical	L	litre	No. or #	number	Pvt	private
H	henry	Lm	loam	Obsc	obscure(d)	PD	private drive
HZ	hertz	Loc	location	Obsn	observation	Prod.	production/produce
HDPE	high density polyethylene	LC	long chord	Ocpd	occupied	Prog	programmed
HM	high mast	Long.	longitude	Ocpy	occupy	Prop.	property
HP	high pressure	Lp	loop	Off Loc	office location	Prop Ln	property line
HPS	high pressure sodium	LD	loop detector	O/s	offset	Ppsd	proposed
Hwy	highway	Lm	lumen	OC	on center	PB	pull box
Hor	horizontal	Lum	luminaire	C	one dimensional consolidation		
HBP	hot bituminous pavement	L Sum	lump sum	OC	organic content		
Hr	hour(s)	Lx	lux	Orig	original		
Hyd	hydrant	ML	main line	O To O	out to out		
Ph	hydrogen ion content	M Hr	man hour	OD	outside diameter		
Id	identification	MH	manhole	OH	overhead		
In or "	inch	Mkd	marked	PMT	pad mounted transformer		
Incl	inclinometer tube	Mkr	marker	Pg	pages		
IMH	inlet manhole	Mkg	marking	Pntd	painted		
ID	inside diameter	MA	mast arm	Pr	pair		
Inst	instrument	Matl	material	Pnl	panel		
Intchg	interchange	Max	maximum	Pk	park		
Intmdt	intermediate	MC	meander corner	PK	Parker-Kalon nail		
Intscn	intersection	Meas	measure	Pa	pascal		
Inv	invert	Mdn	median	PSD	passing sight distance		
IM	iron monument	MD	median drain	Pvmt	pavement		
IPn	Iron Pin	MC	medium curing	Ped	pedestal		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT ABBREVIATIONS

D-101-3

Qty	quantity	Sig	signal	TS	tangent to spiral	WB	Westbound
Qtr	quarter	Si Cl	silt clay	Tel	telephone	Wrng	wiring
Rad or R	radius	Si Cl Lm	silty clay loam	Tel B	Telephone Booth	W/	with
RR	railroad	Si Lm	silty loam	Tel P	telephone pole	W/o	without
Rlwy	railway	Sgl	single	Tv	television	WC	witness corner
Rsd	raised	SC	slow curing	Temp	temperature	WGS	World Geodetic System
RTP	random traverse point	SS	slow setting	Temp	temporary	Z	zenith
Rge or R	range	Sm	small	TBM	temporary bench mark		
RC	rapid curing	S	South	T	tesla		
Rec	record	SE	South East	T	thinwall tube sample		
Rcy	recycle	SW	South West	T/mi	tons per mile		
RPCC	recycled Portland cement concrete	SB	Southbound	Ts	topsoil		
Ref	reference	Sp	spaces	Twp or T	township		
R Mkr	reference marker	Spcl	special	Traf	traffic		
RM	reference monument	SA	special assembly	TSCB	traffic signal control box		
Refl	reflectorized	SP	special provisions	Tr	trail		
RCB	reinforced concrete box	G	specific gravity	Transf	transformer		
RCES	reinforced concrete end section	Spk	spike	TB	transit book		
RCP	reinforced concrete pipe	SC	spiral to curve	Trans	transition		
RCPS	reinforced concrete pipe sewer	ST	spiral to tangent	TT	transmission tower		
Reinf	reinforcement	SB	split barrel sample	Trans	transverse		
Res	reservation	SH	sprinkler head	Trav	traverse		
Ret	retaining	SV	sprinkler valve	TP	traverse point		
Rev	reverse	Sq	square	Trtd	treated		
Rt	right	SF	square feet	Trmt	treatment		
R/W	right of way	Km2	square kilometer	Qc	triaxial compression		
Riv	river	M2	square meter	TERO	tribal employment rights ordinance		
Rd	road	SY	square yard	Tpl	triple		
Rdbd	road bed	Stk	stake	TP	turning point		
Rdwy	roadway	Std	standard	Typ	typical		
RWIS	Roadway Weather Information System	N	standard penetration test	Qu	unconfined compressive strength		
Rk	rock	Std Specs	Standard Specifications	Ugrnd	underground		
Rt	route	Sta	station	USC&G	US Coast & Geodetic Survey		
Salv	salvage(d)	Sta Yd	station yards	USGS	US Geologic Survey		
Sd	sand	Stm L	steam line	Util	utility		
Sdy Cl	sandy clay	SEC	steel encased concrete	VG	valley gutter		
Sdy Cl Lm	sandy clay loam	SSD	stopping sight distance	Vap	vapor		
Sdy Fl	sandy fill	SD	storm drain	Vert	vertical		
Sdy Lm	sandy loam	St	street	VC	vertical curve		
San	sanitary sewer line	SPP	structural plate pipe	VCP	vitrified clay pipe		
Sc	scoria	SPPA	structural plate pipe arch	V	volt		
Sec	seconds	Str	structure	Vol	volume		
Sec	section	Subd	subdivision	Wkwy	walkway		
SL	section line	Sub	subgrade	W	water content		
Sep	separation	Sub Prep	subgrade preparation	WGV	water gate valve		
Seq	sequence	Ss	subsoil	WL	water line		
Serv	service	SE	superelevation	WM	water main		
Sh	shale	SS	supplement specification	WMV	water main valve		
Sht	sheet	Supp	supplemental	W Mtr	water meter		
Shtng	sheeting	Surf	surfacing	WSV	water service valve		
Shldr	shoulder	Surv	survey	WW	water well		
Sw	sidewalk	Sym	symmetrical	W	watt		
S	siemens	SI	Systems International	Wrng	wearing		
SD	sight distance	Tan	tangent	Wb	weber		
SN	sign number	T	tangent (semi)	WIM	Weigh In Motion		
				W	West		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

NDDOT UTILITY COMPANY AND ORGANIZATION ABBREVIATIONS





D-101-10

702COM	702 Communications	GT PLNS NAT GAS	Great Plains Natural Gas Company	RED RIV TEL	Red River Rural Telephone
ACCENT	Accent Communications	HALS TEL	Halstad Telephone Company	RESVTN TEL	Reservation Telephone
AGASSIZ WU	Agassiz Water Users Incorporated	IDEA1	Idea1	ROBRTS TEL	Roberts Company Telephone
AGC	Associated General Contractors of America	INT-COMM TEL	Inter-Community Telephone Company	R-RIDER ELEC	Roughrider Electric Coop
All PI	Alliance Pipeline	KANEB PL	Kaneb Pipeline Company	RRVW	Red River Valley & Western Railroad
ALL SEAS WU	All Seasons Water Users Association	KEM ELEC	Kem Electric Cooperative Incorporated	RSR ELEC	R.S.R. Electric Cooperative
AMOCO PI	Amoco Pipeline Company	KOCH GATH SYS	Koch Gathering Systems Incorporated	S E W U	South East Water Users Incorporated
AMRDA HESS	Amerada Hess Corporation	LKHD PL	Lakehead Pipeline Company	SCOTT CABLE	Scott Cable Television Dickinson
AT&T	AT&T Corporation	LNGDN RWU	Langdon Rural Water Users Incorporated	SHERDN ELEC	Sheridan Electric Cooperative
B PAW	Bear Paw Energy Incorporated	LWR YELL R ELEC	Lower Yellowstone Rural Electric	SHEYN VLY ELEC	Sheyenne Valley Electric Cooperative
BAKER ELEC	Baker Electric	MCKNZ CON	McKenzie Consolidated Telcom	SKYTECH	Skyland Technologies Incorporated
BASIN ELEC	Basin Electric Cooperative Incorporated	MCKNZ ELEC	McKenzie Electric Cooperative	SLOPE ELEC	Slope Electric Cooperative Incorporated
BEK TEL	Bek Communications Cooperative	MCKNZ WRD	McKenzie County Water Resource District	SOURIS RIV TELCOM	Souris River Telecommunications
BELLE PL	Belle Fourche Pipeline Company	MCLEOD	McLeod USA	ST WAT COMM	State Water Commission
BLM	Bureau of Land Management	MCLN ELEC	McLean Electric Cooperative	STATE LN WATER	State Line Water Cooperative
BNSF	Burlington Northern Santa Fe Railway	MCLN-SHRDN R WAT	McLean-Sheridan Rural Water	STER ENG	Sterling Energy
BOEING	Boeing	MDU	Montana-dakota Utilities	STUT RWU	Stutsman Rural Water Users
BRNS RWD	Barnes Rural Water District	MID-CONT CABLE	Mid-Continent Cable	SW PL PRJ	Southwest Pipeline Project
BURK-DIV ELEC	Burke-Divide Electric Cooperative	MIDSTATE TEL	Midstate Telephone Company	T M C	Turtle Mountain Communications
BURL WU	Burleigh Water Users	MINOT CABLE	Minot Cable Television	TCI	TCI of North Dakota
Cable One	Cable One	MINOT TEL	Minot Telephone Company	TESORO GHG PLNS PL	Tesoro High Plains Pipeline
CABLE SERV	Cable Services	MISS W W S	Missouri West Water System	TRI-CNTY WU	Tri-County Water Users Incorporated
CAP ELEC	Capital Electric Cooperative Incorporat	MNKOTA PWR	Minnkota Power	TRL CO RWU	Traill County Rural Water Users
CASS CO ELEC	Cass County Electric Cooperative	MOR-GRAN-SOU ELEC	Mor-gran-sou Electric Cooperative	UNTD TEL	United Telephone
CASS RWU	Cass Rural Water Users Incorporated	MOUNT-WILLI ELEC	Mountrail-williams Electric Cooperative	UPPR SOUR WUA	Upper Souris Water Users Association
CAV ELEC	Cavalier Rural Electric Cooperative	MRE LBTY TEL	Moore & Liberty Telephone	US SPRINT	U.S. Sprint
CBLCOM	Cablecom Of Fargo	MUNICIPAL	City Water And Sewer	USAF MSL CABLE	U.S.A.F. Missile Cable
CENEX PL	Cenex Pipeline	MUNICIPAL	City Of '.....'	USFWS	US Fish and Wildlife Service
CENT PL WATER DIST	Central Pipe Line Water District	N CENT ELEC	North Central Electric Cooperative	USW COMM	U.S. West Communications
CENT PWR ELEC	Central Power Electric Cooperative	N VALL W DIST	North Valley Water District	VRNDRY ELEC	Verendrye Electric Cooperative
COE	Corps of Engineers	ND PKS & REC	North Dakota Parks And Recreation	W RIV TEL	West River Telephone Incorporated
CONS TEL	Consolidated Telephone	ND TEL	North Dakota Telephone Company	WEB	W. E. B. Water Development Association
CONT RES	Continental Resource Inc	NDDOT	North Dakota Department of Transportation	WILLI RWA	Williams Rural Water Association
CPR	Canadian Pacific Railway	NDSU SOIL SCI DEPT	NDSU Soil Science Department	WILSTN BAS PL	Williston Basin Interstate Pipeline Company
D O E	Department Of Energy	NEMONT TEL	Nemont Telephone	WLSH RWD	Walsh Water Rural Water District
DAK CARR	Dakota Carrier Network	NODAK R ELEC	Nodak Rural Electric Cooperative	WOLVRTN TEL	Wolverton Telephone
DAK CENT TEL	Dakota Central Telephone	NOON FRMS TEL	Noonan Farmers Telephone Company	XLENER	Xcel Energy
DAK RWD	Dakota Rural Water District	NPR	Northern Plains Railroad	YSVR	Yellowstone Valley Railroad
DGC	Dakota Gasification Company	NSP	Northern States Power		
DICKEY R NET	Dickey Rural Networks	NTH PRAIR RW	Northern Prairie Rural Water Association		
DICKEY RWU	Dickey Rural Water Users Association	NTHN BRDR PL	Northern Border Pipeline		
DICKEY TEL	Dickey Telephone	NTHN PLNS ELEC	Northern Plains Electric Cooperative Incorporated		
DNRR	Dakota Northern Railroad	NTHWSTRN REF	Northwestern Refinery Company		
DOME PL	Dome Pipeline Company	NW COMM	Northwest Communication Cooperation		
DVELEC	Dakota Valley Electric Cooperative	ONEOK	Oneok gas		
DVMW	Dakota, Missouri Valley & Western	OSHA	Occupational Safety and Health Administration		
ENBRDG	Enbridge Pipelines Incorporated	OTTR TL PWR	Otter Tail Power Company		
ENVENTIS	Enventis Telephone	P L E M	Prairielands Energy Marketing		
FALK MNG	Falkirk Mining Company	POLAR COM	Polar Communications		
FHWA	Federal Highway Administration	PVT ELEC	Private Electric		
G FKS-TRL WD	Grand Forks-traill Water District	QWEST	Qwest Communications		
GETTY TRD & TRAN	Getty Trading & Transportation	R&T W SUPPLY	R & T Water Supply Association		
GLDN W ELEC	Golden West Electric Cooperative	RAMSEY R SEW	Ramsey Rural Sewer Association		
GRGS CO TEL	Griggs County Telephone	RAMSEY RW	Ramsey Rural Water Association		
		RAMSEY UTIL	Ramsey County Rural Utilities		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Line Styles

	Subgrade Reinforcement		Existing Railroad Switch		Sheet Piling
	Existing Down Guy Wire Down Guy		Overhead Sign Structure Cantilever		W-Beam w Posts
	Existing Fence		24 Inch Pipe		Existing W-Beam Guardrail with Posts
	Existing Railroad		Reinforced Concrete Pipe		Exst Wet Area-Vegetation Break
	Existing Sanitary Sewer		Signal Head with Mast Arm		Existing Wetland Delineated
	Existing Sanitary Force Main		Existing Signal Head with Mast Arm		
	Existing Storm Drain		Tie Bar at Random Spacing		
	Existing Storm Drain Force Main		3-Cable w Posts		
	Fence		Existing 3-Cable w Posts		
	Silt Fence		Site Boundary		
	Existing Field Line		Fiber Rolls		
	Exst Flow		Doweled Joint		
	Flow		Tie Bar 30 Inch 4 Foot Center to Center		
	Existing Culvert		Tie Bar 18 Inch 3 Foot Center to Center		
	Existing Curb		Existing Berm, Dike, Pit, or Earth Dam		
	Existing Valley Gutter		Existing Ditch Block		
	Existing Driveway Gutter		Depression Contours		
	Existing Curb and Gutter		Existing City Corporate Limits or Reservation Boundary		
	Existing Mountable Curb and Gutter		Gravel Pit - Borrow Area		
	Existing Double Micro Loop Detector		Existing Tree Boundary		
	Micro Loop Detector Double		Tree Row		
	Existing Overhead Sign Structure		Existing Brush or Shrub Boundary		
	Existing Micro Loop Detector		Existing Retaining Wall		
	Micro Loop Detector		Existing Planter or Wall		
	Existing Overhead Sign Structure Cantilever		Retaining Wall (Plan View)		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	North Arrow (Half Scale)		Attenuation Device		Existing Railroad Battery Box		Existing Delineator Type E
	Truck Mounted Attenuator		Diamond Grade Delineator Type A		Existing Bush or Shrub		Existing EFB Misc
	Type I Barricade		Diamond Grade Delineator Type B		Existing Gas Cap or Stub		Existing Flashing Beacon
	Type II Barricade		Diamond Grade Delineator Type C		Existing Sanitary Cap or Stub		Existing Pipe Mounted Flasher
	Type III Barricade		Diamond Grade Delineator Type D		Existing Storm Drain Cap or Stub		Existing Pad Mounted Feed Point
	Catch Basin		Diamond Grade Delineator Type E		Existing Water Cap or Stub		Existing Pipe Mounted Feed Point with Pad
	Cairn or Stone Circle		Flexible Delineator		Existing Sanitary Cleanout		Existing Pole Mounted Feed Point
	Video Detection Camera		Flexible Delineator Type A		Existing Concrete Foundation		Existing Railroad Frog
	Storm Drain Cap or Stub		Flexible Delineator Type B		Existing Traffic Signal Controller		Existing Snow Gate 18
	Corrugated Metal End Section 18 Inch		Flexible Delineator Type C		Existing Pad Mounted Signal Controller		Existing Snow Gate 28
	Corrugated Metal End Section 24 Inch		Flexible Delineator Type D		Existing Sixteenth Section Corner		Existing Snow Gate 40
	Corrugated Metal End Section 30 Inch		Flexible Delineator Type E		Existing Quarter Section Corner		Existing Headwall
	Corrugated Metal End Section 36 Inch		Delineator Type A		Existing Section Corner		Existing Pedestrian Head with Number
	Corrugated Metal End Section 42 Inch		Delineator Type A Reset		Existing Railroad Crossbuck		Existing Signal Head
	Corrugated Metal End Section 48 Inch		Delineator Type B		Existing Satellite Dish		Existing Sprinkler Head
	Concrete Foundation		Delineator Type B Reset		Existing Fuel Dispensers		Existing Fire Hydrant
	Ground Connection Conductor		Delineator Type C		Existing Flexible Delineator Type A		Existing Catch Basin Drop Inlet
	Neutral Connection Conductor		Delineator Type D		Existing Flexible Delineator Type B		Existing Curb Inlet
	Phase 1 Connection Conductor		Delineator Type E		Existing Flexible Delineator Type C		Existing Manhole Inlet
	Phase 2 Connection Conductor		Delineator Drums		Existing Flexible Delineator Type D		Existing Junction Box
	Traffic Cone		Spot Elevation		Existing Flexible Delineator Type E		
	Signal Controller		Existing Access Control Arrow		Existing Delineator Type A		
	Pad Mounted Signal Controller		Existing Artifact		Existing Delineator Type B		
	Alignment Data Point		Existing Flashing Beacon		Existing Delineator Type C		
	Emergency Vehicle Detector		Existing Benchmark		Existing Delineator Type D		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

	Existing Light Standard		Existing Manhole with Valve Water		Existing Telephone Pole		Existing Undefined Manhole
	Existing High Mast Light Standard 10 Luminaire		Existing Water Manhole		Existing Wood Pole		Existing Undefined Pull Box
	Existing High Mast Light Standard 3 Luminaire		Existing Mile Post Type A		Existing Post		Existing Undefined Pedestal
	Existing High Mast Light Standard 4 Luminaire		Existing Mile Post Type B		Existing Pedestrian Push Button Post		Existing Undefined Valve
	Existing High Mast Light Standard 5 Luminaire		Existing Mile Post Type C		Existing Control Point CP		Existing Undefined Pipe Vent
	Existing High Mast Light Standard 6 Luminaire		Existing Reference Marker		Existing Control Point GPS-RTK		Existing Gas Valve
	Existing High Mast Light Standard 7 Luminaire		Existing RW Marker		Existing Control Point TRI		Existing Water Valve
	Existing High Mast Light Standard 8 Luminaire		Existing Utility Marker		Existing Reference Marker Point NGS		Existing Fuel Pipe Vent
	Existing High Mast Light Standard 9 Luminaire		Iron Monument Found		Existing Pull Box		Existing Gas Pipe Vent
	Existing Overhead Sign Structure Load Center		Iron Pin R/W Monument		Existing Intelligent Transportation Pull Box		Existing Sanitary Pipe Vent
	Existing Luminaire		Existing Object Marker Type I		Existing Water Pump		Existing Storm Drain Pipe Vent
	Existing Light Standard Luminaire		Existing Object Marker Type II		Existing Slotted Reinforced Concrete Pipe		Existing Water Pipe Vent
	Existing Federal Mailbox		Existing Object Marker Type III		Existing RR Profile Spot		Existing Weather Station
	Existing Private Mailbox		Existing Electrical Pedestal		Existing Fuel Leak Sensors		Existing Ground Water Well Bore Hole
	Existing Meander Section Corner		Existing Telephone Pedestal		Existing Highway Sign		Existing Windmill or Tower
	Existing Meter		Existing Fiber Optic Telephone Pedestal		Existing Miscellaneous Spot		Existing Witness Corner
	Existing Electrical Manhole		Existing TV Pedestal		Existing Lighting Standard Pole		Flashing Beacon
	Existing Gas Manhole		Existing Fiber Optic TV Pedestal		Existing Traffic Signal Standard		Flagger
	Existing Sanitary Manhole		Existing Fuel Filler Pipes		Existing Transformer		Pipe Mounted Flasher
	Existing Sanitary Force Main Manhole		Existing Traverse PI Aerial Panel		Existing Large Evergreen Tree		Sanitary Force Main with Valve
	Existing Sanitary Manhole with Valve		Existing Pole		Existing Small Evergreen Tree		
	Existing Storm Drain Manhole		Existing Power Pole		Existing Large Tree		
	Existing Force Main Storm Drain Manhole		Existing Power Pole with Transformer		Existing Small Tree		
	Existing Force Main Storm Drain Manhole with Valve				Existing Tree Trunk		
	Existing Telephone Manhole				Existing Pad Mounted Traffic Signal Control Box		

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 07/01/14 and the original document is stored at the North Dakota Department of Transportation

Symbols

D-101-32



 Pad Mounted Feed Point  Pipe Mounted Feed Point with Pad  Pole Mounted Feed Point  Headwall  Double Headwall with Vegetation Barrier  Single Headwall with Vegetation Barrier  Pole Mounted Head  Sprinkler Head  Fire Hydrant  Inlet Type 1  Inlet Type 2  Double Inlet Type 2  Inlet Gate Type 2  Junction Box  High Mast Light Standard 10 Luminaire  High Mast Light Standard 3 Luminaire  High Mast Light Standard 4 Luminaire  High Mast Light Standard 5 Luminaire  High Mast Light Standard 6 Luminaire  High Mast Light Standard 7 Luminaire  High Mast Light Standard 8 Luminaire  High Mast Light Standard 9 Luminaire  Relocate Light Standard  Overhead Sign Structure Load Center  Light Standard 100 Watt High Pressure Sodium Vapor Luminaire	 Light Standard 1000 Watt High Pressure Sodium Vapor Luminaire  Light Standard 150 Watt High Pressure Sodium Vapor Luminaire  Light Standard 175 Watt High Pressure Sodium Vapor Luminaire  Light Standard 200 Watt High Pressure Sodium Vapor Luminaire  Light Standard 250 Watt High Pressure Sodium Vapor Luminaire  Light Standard 310 Watt High Pressure Sodium Vapor Luminaire  Light Standard 35 Watt High Pressure Sodium Vapor Luminaire  Light Standard 400 Watt High Pressure Sodium Vapor Luminaire  Light Standard 50 Watt High Pressure Sodium Vapor Luminaire  Light Standard 70 Watt High Pressure Sodium Vapor Luminaire  Light Standard 700 Watt High Pressure Sodium Vapor Luminaire  Manhole  Manhole 48 Inch  Sanitary Force Main Manhole  Sanitary Sewer Manhole  Storm Drain Manhole  Storm Drain Manhole with Inlet  Reset Mile Post  Mile Post Type A  Mile Post Type B  Mile Post Type C  Right of Way Marker  Tubular Marker  Alignment Monument  Iron Pin Reference Monument	 Object Marker Type I  Object Marker Type II  Object Marker Type III  Caution Mode Arrow Panel  Back to Back Vertical Panel Sign  Double Direction Arrow Panel  Left Directional Arrow Panel  Right Directional Arrow Panel  Sequencing Arrow Panel  Truck Mounted Arrow Panel  Power Pole  Wood Pole  Pedestrian Push Button Post  Property Corner  Pull Box  Intelligent Transportation Pull Box  Sanitary Pump  Storm Drain Pump  Reinforced Pavement  Reinforced Concrete End Section 15 Inch  Reinforced Concrete End Section 18 Inch  Reinforced Concrete End Section 24 Inch  Reinforced Concrete End Section 30 Inch  Reinforced Concrete End Section 36 Inch  Reinforced Concrete End Section 42 Inch	 Reinforced Concrete End Section 48 Inch  Reinforced Concrete End Section 54 Inch  Reset Right of Way Marker  Reset USGS Marker  Right of Way Markers  Riser 30 Inch  Continuous Split Barrel Sample  Flight Auger Sample  Split Barrel Sample  Thinwall Tube Sample  Highway Sign  SNOW GATE 18 FT  SNOW GATE 28 FT  SNOW GATE 40 FT  Standard Penetration Test  Transformer  Inclinometer Tube  Underdrain Cleanout  Excavation Unit  Water Valve
---	--	---	--

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
07-01-14	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by
Roger Weigel,
 Registration Number
PE-2930,
 on 07/01/14 and the original document is stored at the
 North Dakota Department
 of Transportation

LANE MARKERS
(Spotting Tab for Seal Projects only)

D-704-3

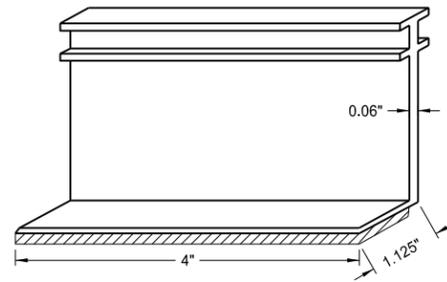

Marker Body

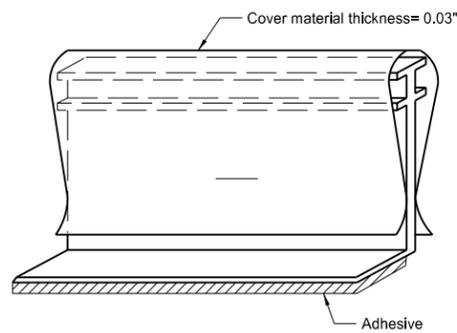


Marker Body with Protective Cover

Notes:

1. The lane line markers shall be installed as shown, prior to the beginning of the seal coat.
2. The cover shall be attached to the vertical part of the marker in such a way that traffic will not cause it to detach and so that it may be easily removed manually.
3. The protective covers shall be removed, immediately after the seal coat is applied.
4. The markers shall be removed after permanent pavement marking has been installed.
5. The marker body and cover shall be manufactured from polyurethane material.
6. Marker types:
Type Y - Yellow body and cover with yellow reflective tape on both sides.
Type W - White body and cover with white reflective tape on one side.
7. The reflective tape shall be a retroreflective material. The tape shall have a minimum reflectance of 1200 candle power per foot-candle per square foot, using a .1 degree observation angle and 0 degree entrance angle.
8. The adhesive shall conform to AASHTO M 237.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation.

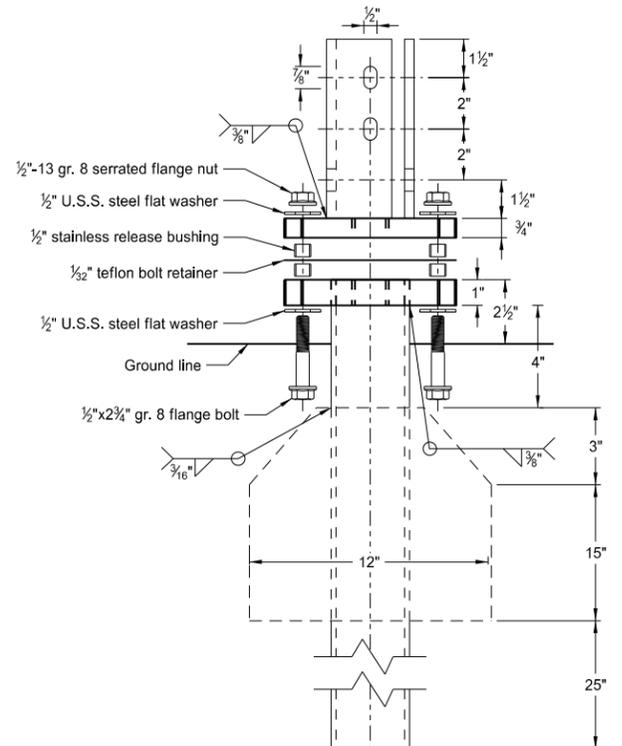


Multi-Directional Slip Base Assembly

Perforated Tube

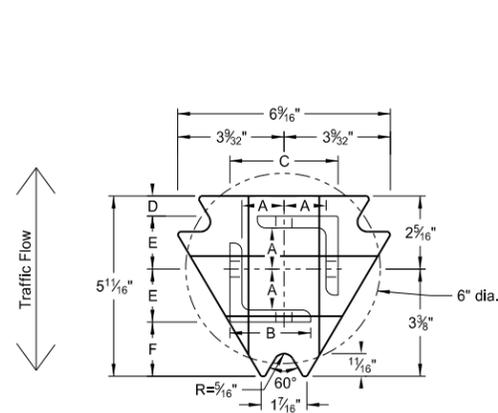

Top Post Receiver
Plate - ASTM A572 grade 50
Angle Receiver - 2 1/2" x 2 1/2" x 3/8" ASTM A36 structural angle

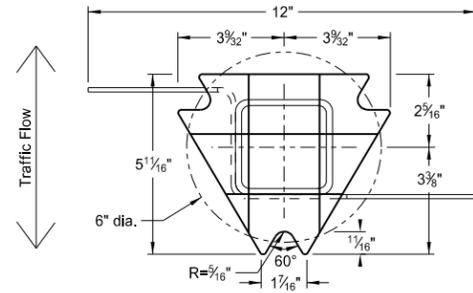

Bottom Soil Stub
Tube - 3"x3"x7 gauge ASTM A500 grade B tube
Stabilizing Wing - 7 gauge H.R.P.O. ASTM A1011
Plate - ASTM A572 grade 50


Notes:

1. Slip base bolts shall be torqued as specified by the manufacturer.
2. Anchor shall have a yield strength of 43.9 KSI and tensile strength of 59.3 KSI.
3. The 4" vertical clearance is required for the anchor or breakaway base. The 4"x60" measurement shall be made above and below post location and also back and ahead of the post.
4. When used in concrete sidewalk, anchor shall be same except without the wings.
5. Four post signs shall have over 7' between the first and the fourth posts.


Telescoping Perforated Tube						
Number of Posts	Post Size in.	Wall Thickness Gauge	Sleeve Size in.	Wall Thickness Gauge	Slip Base	Anchor Size without Slip Base in.
1	2	12			No	2 1/4
1	2 1/4	12			No	2 1/2
1	2 1/2	12			(A)	3
1	2 1/2	10			Yes	
1	2 1/4	12	2	12	Yes	
1	2 1/2	12	2 1/4	12	Yes	
2	2	12			No	2 1/4
2	2 1/4	12			No	2 1/2
2	2 1/2	12			Yes	
2	2 1/2	12			Yes	
2	2 1/4	10	2	12	Yes	
2	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/2	12			Yes	
3 & 4	2 1/2	10			Yes	
3 & 4	2 1/2	12	2 1/4	12	Yes	
3 & 4	2 1/4	12	2	12	Yes	
3 & 4	2 1/2	10	2 3/16	10	Yes	

Properties of Telescoping Perforated Tube						
Tube Size in.	Wall Thickness in.	U.S. Standard Gauge	Weight per Foot lbs.	Moment of Inertia in. ⁴	Cross Sec. Area in. ²	Section Modulus in. ³
1 1/2 x 1 1/2	0.105	12	1.702	0.129	0.380	0.172
2 x 2	0.105	12	2.416	0.372	0.590	0.372
2 1/4 x 2 1/4	0.105	12	2.773	0.561	0.695	0.499
2 3/16 x 2 3/16	0.135	10	3.432	0.605	0.841	0.590
2 1/2 x 2 1/2	0.105	12	3.141	0.804	0.803	0.643
2 1/2 x 2 1/2	0.135	10	4.006	0.979	1.010	0.785


Top Post Receiver Data Table						
Square Post Sizes (B)	A	B	C	D	E	F
2 3/16" x 10 ga.	1 9/64"	2 1/2"	3 1/32"	2 5/32"	1 33/64"	1 1/8"
2 1/2" x 10 ga.	1 9/32"	2 1/2"	3 5/16"	5/8"	1 21/32"	1 3/4"

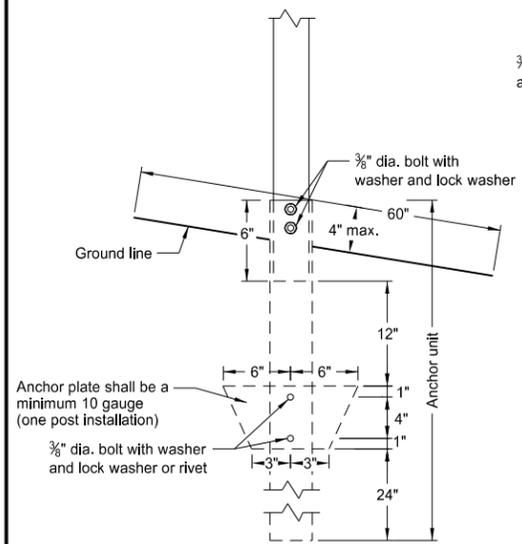


Anchor Unit and Post Assembly

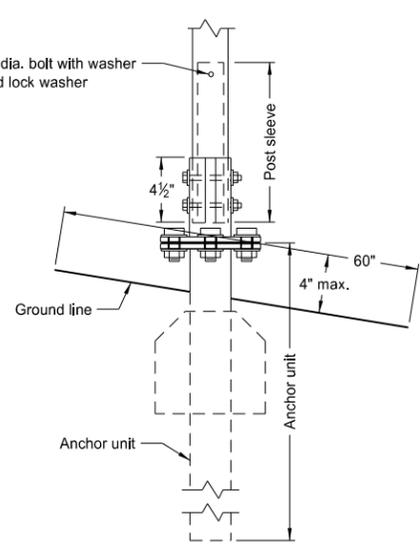

Multi-Directional Slip Base Anchor Unit and Post Sleeve Assembly

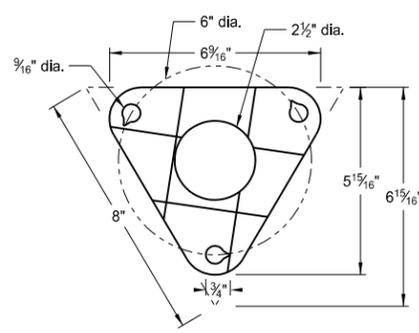

Bolt Retainer for Base Connection
Bolt Retainer - 1/32" Reprocessed Teflon


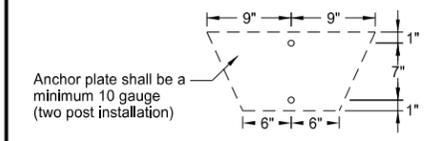


Anchor plate shall be a minimum 10 gauge (two post installation)

- (A) The breakaway base is required when the support is placed in weak soils. The Engineer shall determine if the soils are weak.
(B) The 2 3/16" x 10 ga. may be inserted into 2 1/2" x 10 ga. for additional wind load.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION		This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation
2-28-14		
REVISIONS		
DATE	CHANGE	

U-Channel Post

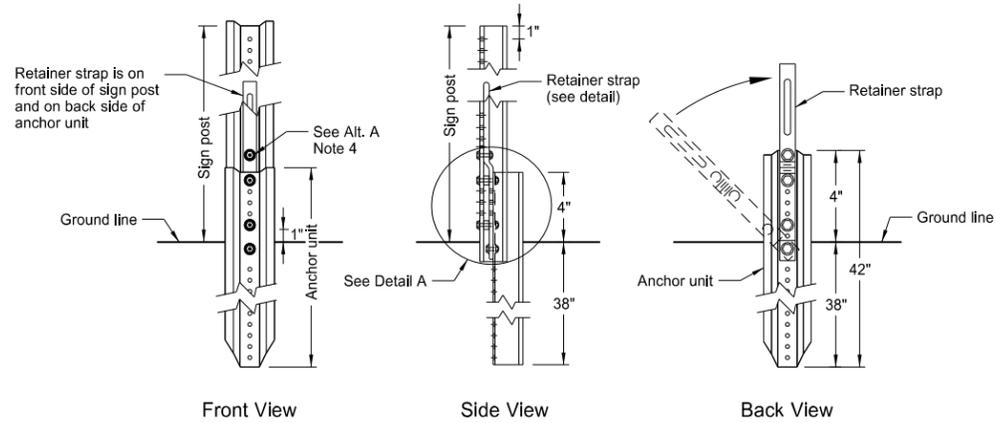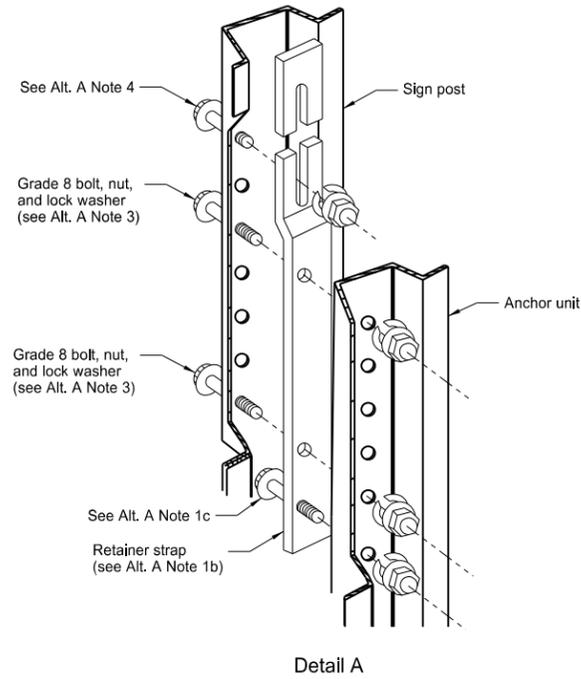


Breakaway U-Channel Detail Alternate A

A maximum of 2 posts shall be installed within 7'.

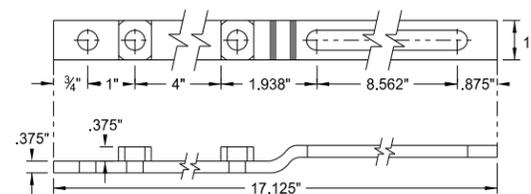


Retainer Strap Detail

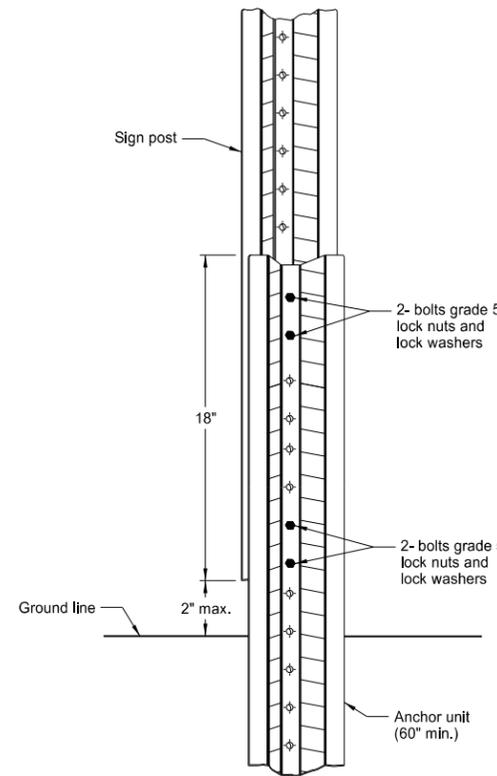

Breakaway U-Channel Splice Detail Alternate B (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

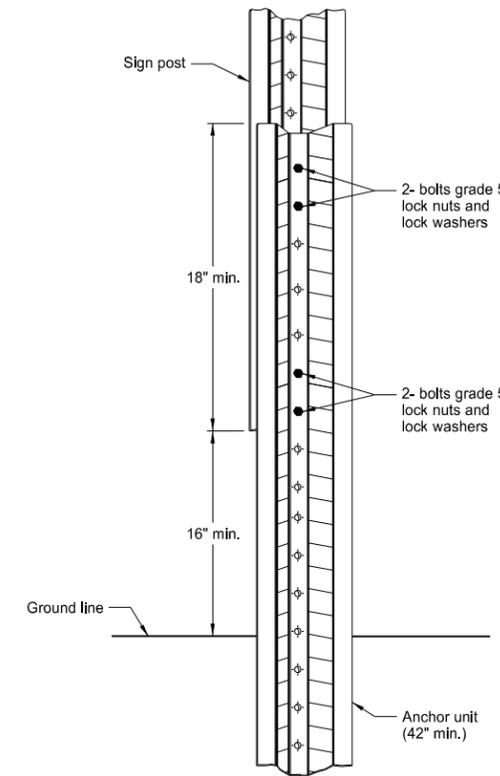

Breakaway U-Channel Splice Detail Alternate C (2.5 and 3 lb/ft)

A maximum of 3 posts shall be installed within 7'.

Alternate A Steps of Installation:












1. a) Drive anchor unit to within 12" of ground level.
b) Proper assembly established by lining up the bottom hole of retainer strap with the 6th hole from the top of the anchor unit.
c) Assemble strap to back of anchor unit using 5/16"x2" bolt, lock washer and nut.
d) Rotate strap 90° to left.
2. a) Drive anchor unit to 4" above ground.
b) Rotate strap to vertical position.
3. a) Place 5/16"x2" bolt, lock washer and nut in bottom of sign post to facilitate alignment of sign post with proper hole in anchor unit.
b) Alternately tighten two connector bolts.
4. Complete assembly by tightening 5/16"x2" bolt (this fastens sign post to retainer strap).
5. The base post, strap and sign post shall be properly nested. Proper nesting occurs when all flat surfaces of the base post, strap, and sign post at the bolts have full contact across the entire width.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
2-28-14	
REVISIONS	
DATE	CHANGE



This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 2/28/14 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN DETAILS
 TERMINAL AND GUIDE SIGNS

D-704-9

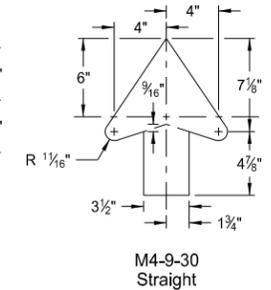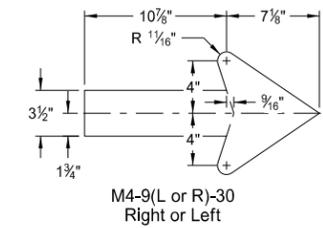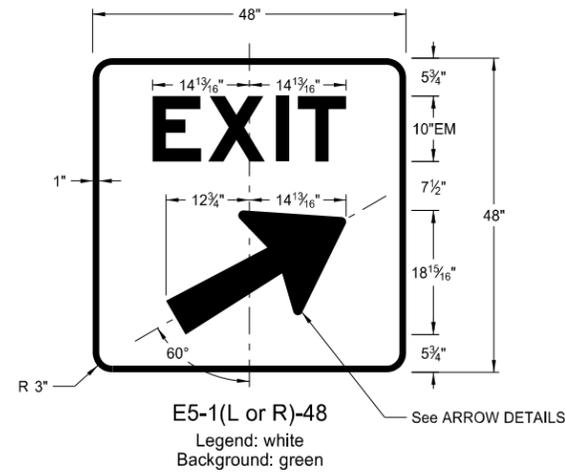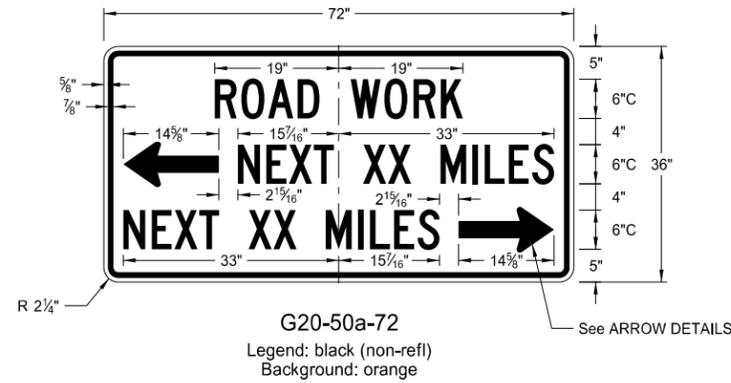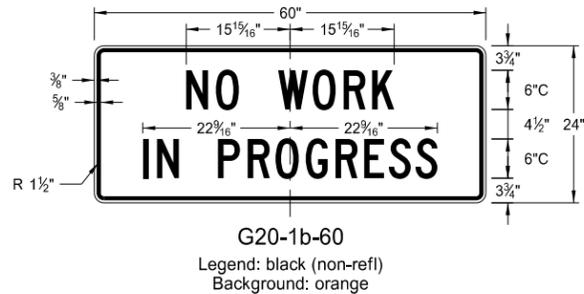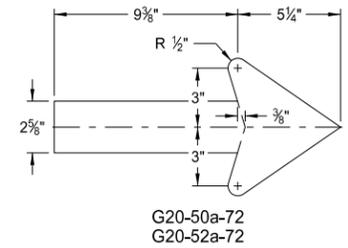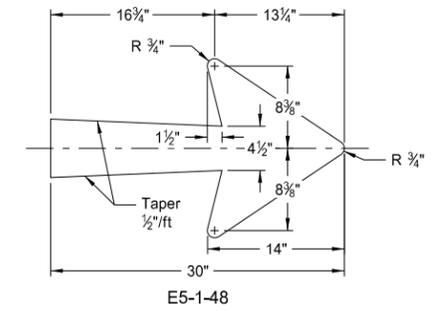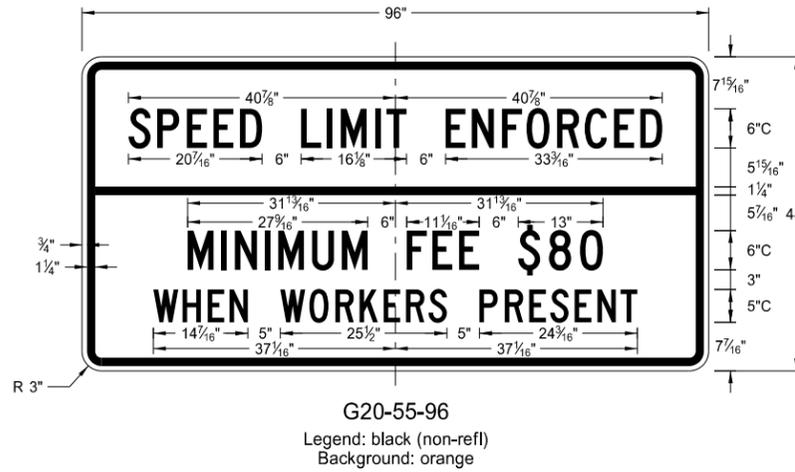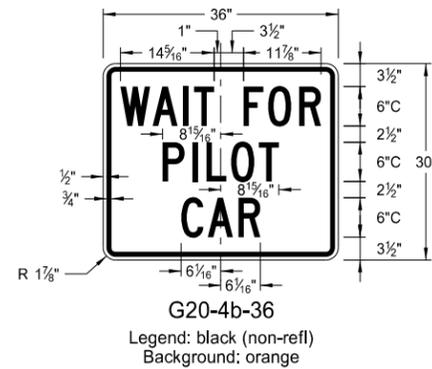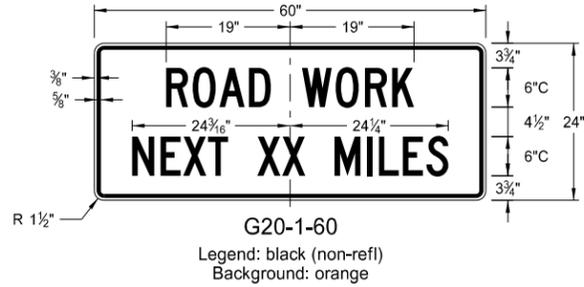

ARROW DETAILS

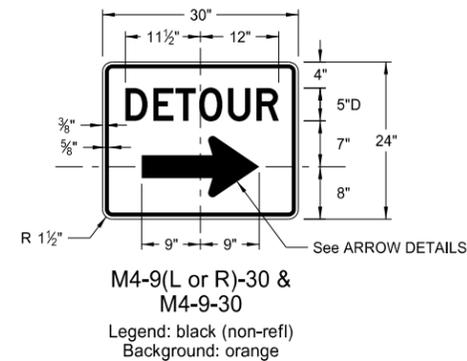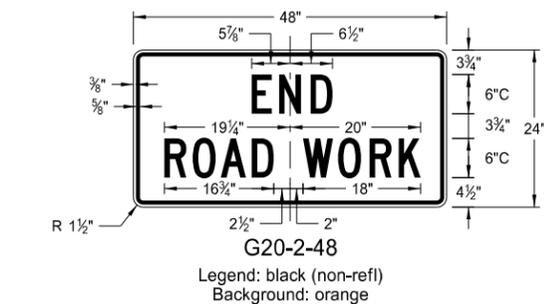

NOTES:


(A) Arrow may be right or left of the legend to indicate construction to the right or left.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
 Roger Weigel,
 Registration Number
 PE-2930,
 on 8/13/13 and the original document is stored at the
 North Dakota Department
 of Transportation

CONSTRUCTION SIGN DETAILS
REGULATORY SIGNS


D-704-10

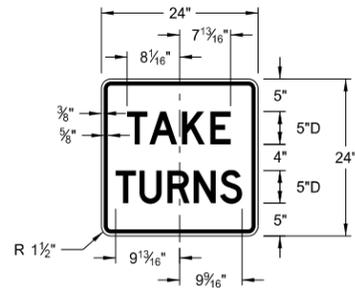


R1-50-24
Legend: black (non-refl)
Background: white

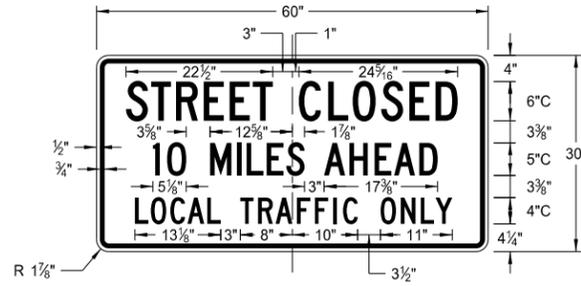

R11-3c-60
Legend: black (non-refl)
Background: white

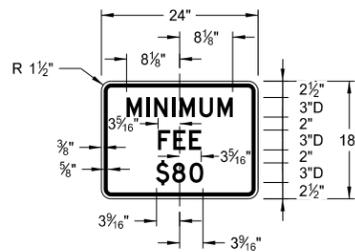

R2-1a-24
Legend: black (non-refl)
Background: white

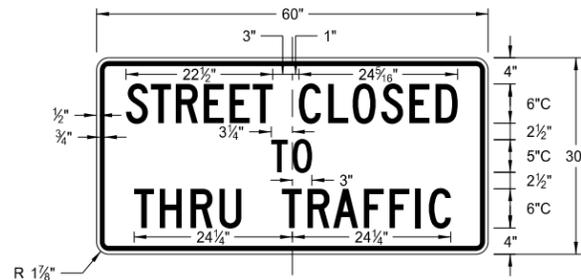

R11-4a-60
Legend: black (non-refl)
Background: white



R11-2a-48
Legend: black (non-refl)
Background: white


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation


CONSTRUCTION SIGN DETAILS
WARNING SIGNS

WORD	LETTER SPACING
AHEAD	Standard
200 FT	Standard
350 FT	Standard
500 FT	Standard
1000 FT	Reduce 40%
1500 FT	Reduce 40%
½ MILE	Reduce 50%
1 MILE	Standard


* DISTANCE MESSAGES

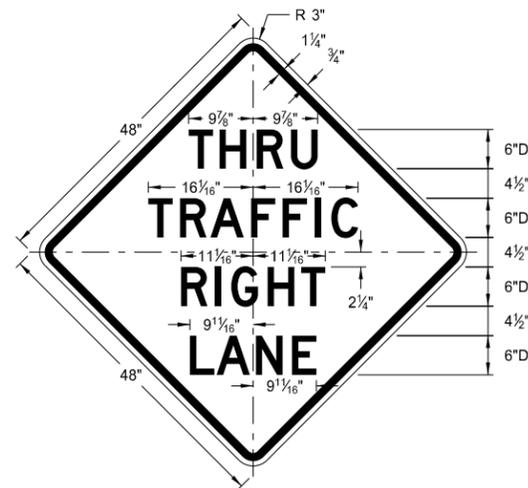


W5-8-48
Legend: black (non-refl)
Background: orange

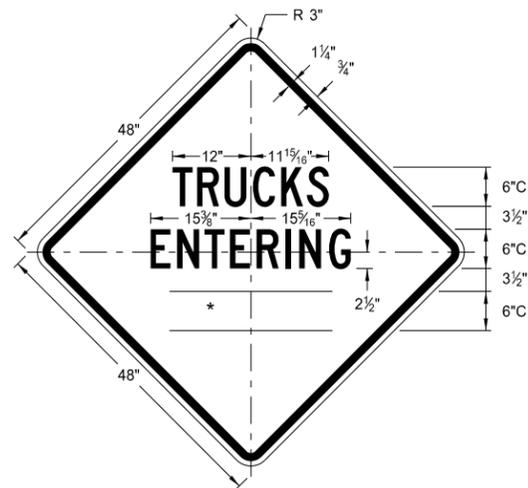


W8-54-48
Legend: black (non-refl)
Background: orange

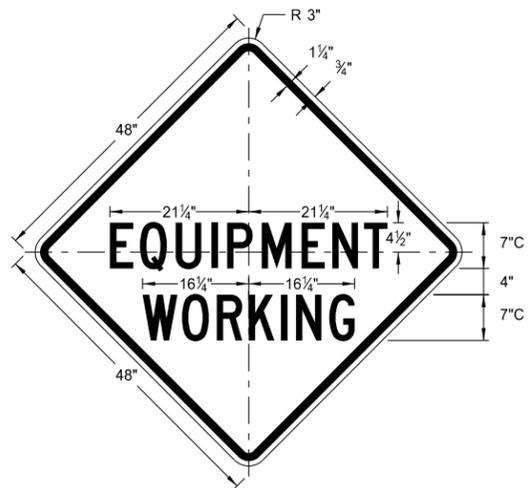


W20-51-48
Legend: black (non-refl)
Background: orange

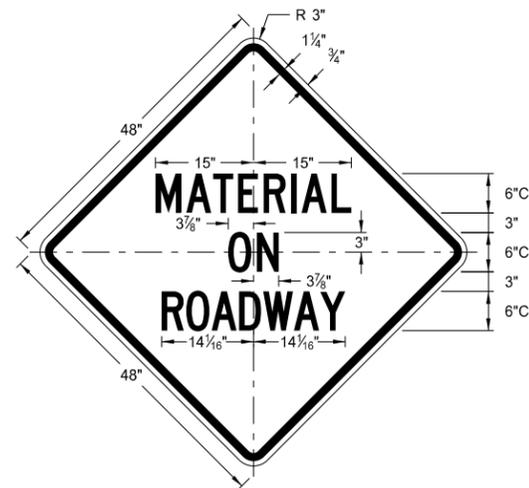


W21-51-48
Legend: black (non-refl)
Background: orange

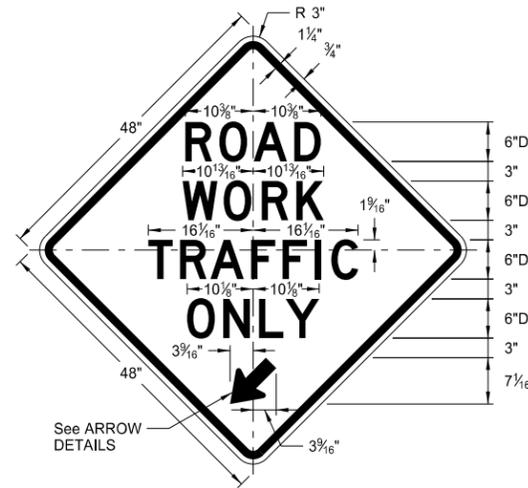


W5-9-48
Legend: black (non-refl)
Background: orange

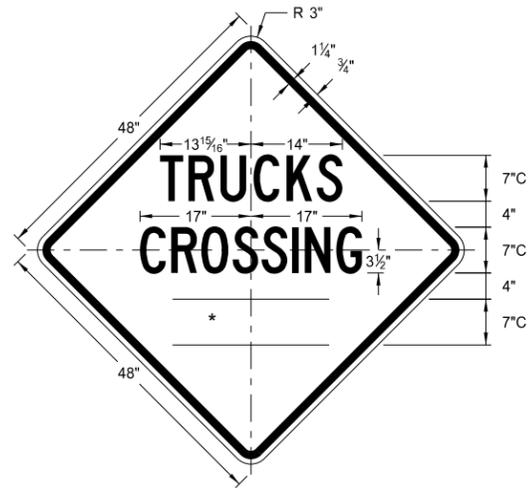


W8-55-48
Legend: black (non-refl)
Background: orange

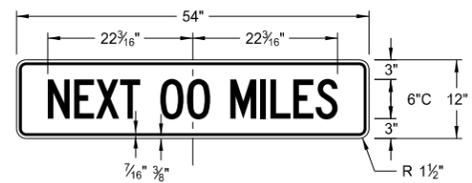


W20-52-54
Legend: black (non-refl)
Background: orange

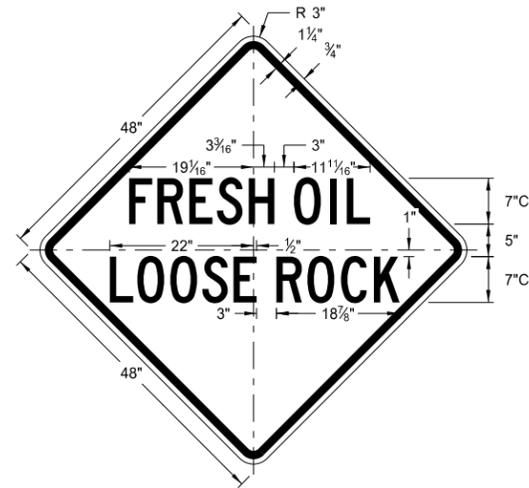


W22-8-48
Legend: black (non-refl)
Background: orange




W5-9-48
ARROW DETAILS

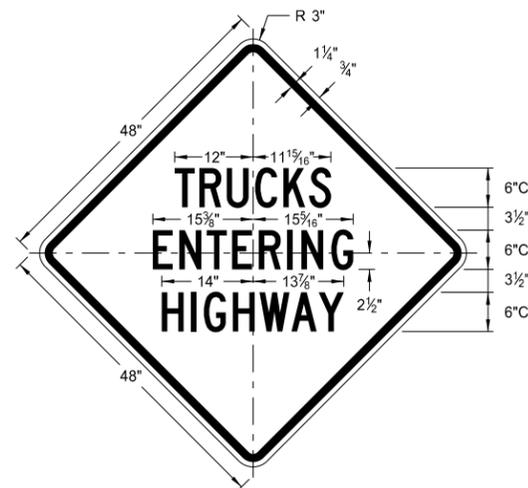

W8-53-48
Legend: black (non-refl)
Background: orange

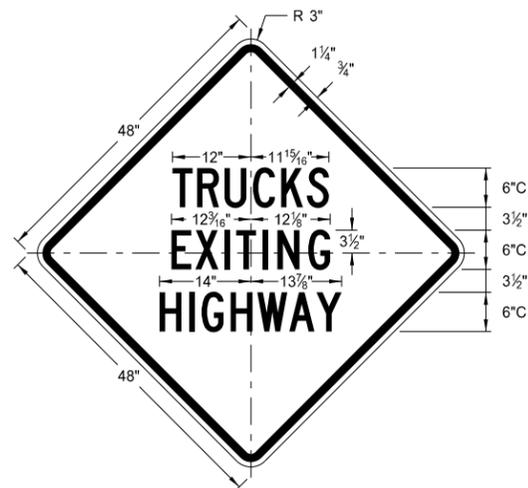

W8-56-48
Legend: black (non-refl)
Background: orange

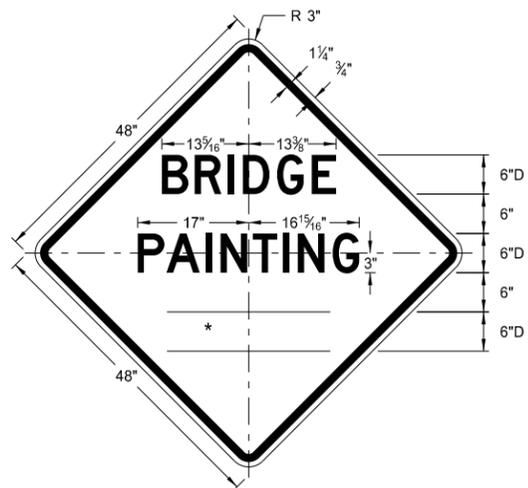


W21-50-48
Legend: black (non-refl)
Background: orange

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
8-13-13	
REVISIONS	
DATE	CHANGE




This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 8/13/13 and the original document is stored at the North Dakota Department of Transportation

SHOULDER CLOSURE TAPERS

D-704-12

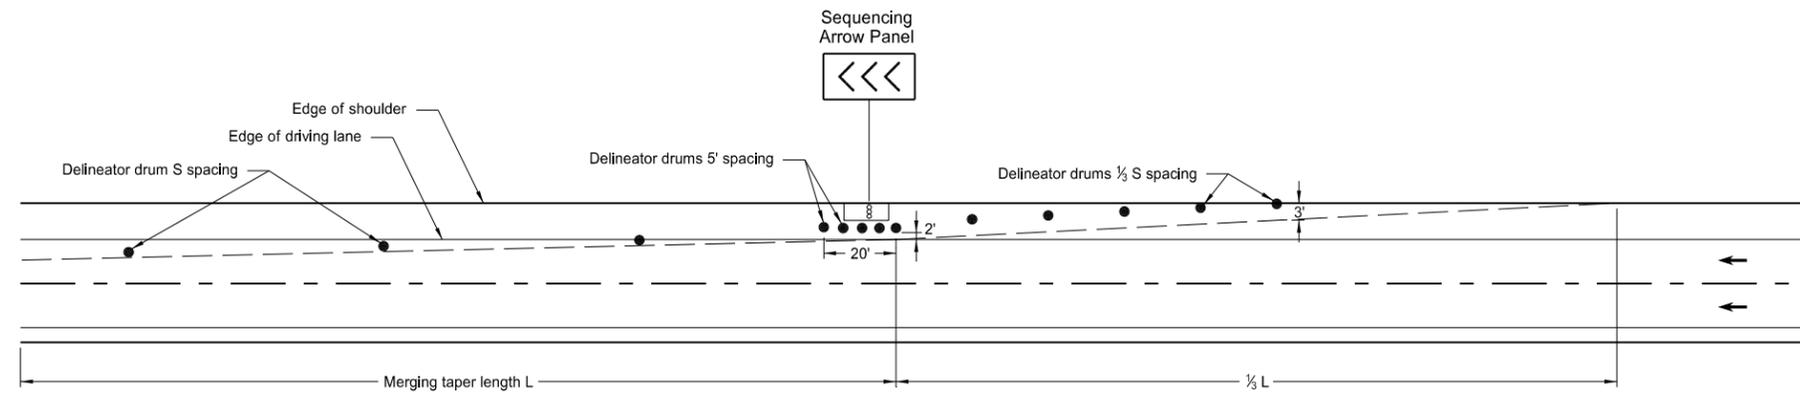

SHOULDER CLOSURE WITH LANE CLOSURE
(when shoulder is 8' or wider)

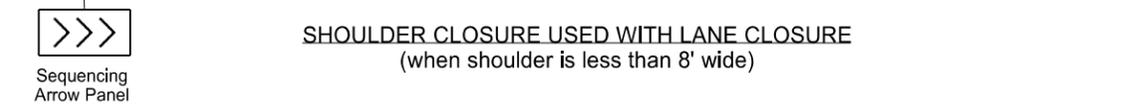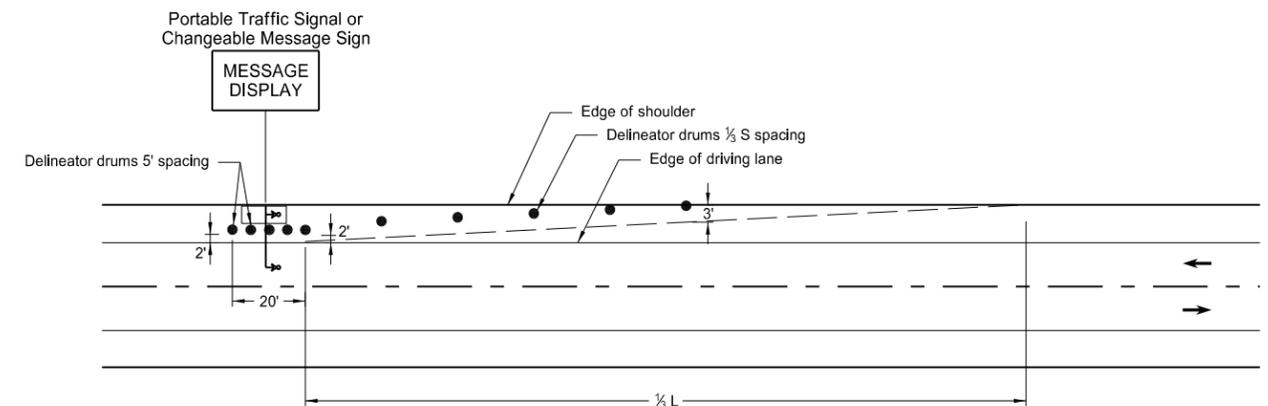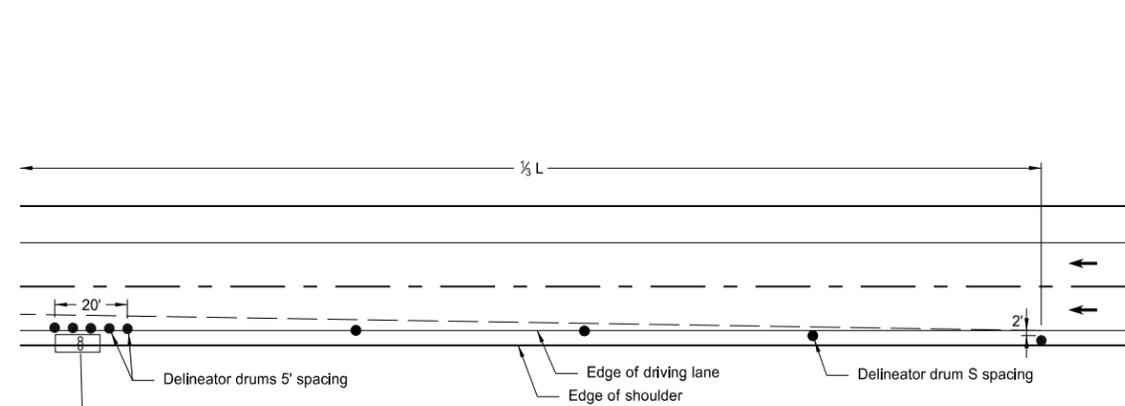

SHOULDER CLOSURE USED WITH LANE CLOSURE
(when shoulder is less than 8' wide)

PORTABLE TRAFFIC SIGNAL OR CHANGEABLE MESSAGE SIGN ON SHOULDER

KEY	
● Delineator Drum	∞ Sequencing Arrow Panel
• Message Display	↳ Portable Traffic Signal


Notes:

- S = Posted Speed Limit in mph
W = Width of offset in feet
L = Taper length in feet
L = WS²/60 (40mph or less)
L = WS (45mph or more)
- If a shoulder taper is used, it should have a length of approximately 1/3 L. If a shoulder is used as a travel lane, a normal merging or shifting taper should be used.
- When paved shoulders of 8 foot width or more are closed, channelizing devices shall be used to close the shoulder in advance to delineate the beginning of the work space and direct vehicular traffic to remain within the traveled way.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

BARRICADE AND CHANNELIZING DEVICE DETAILS

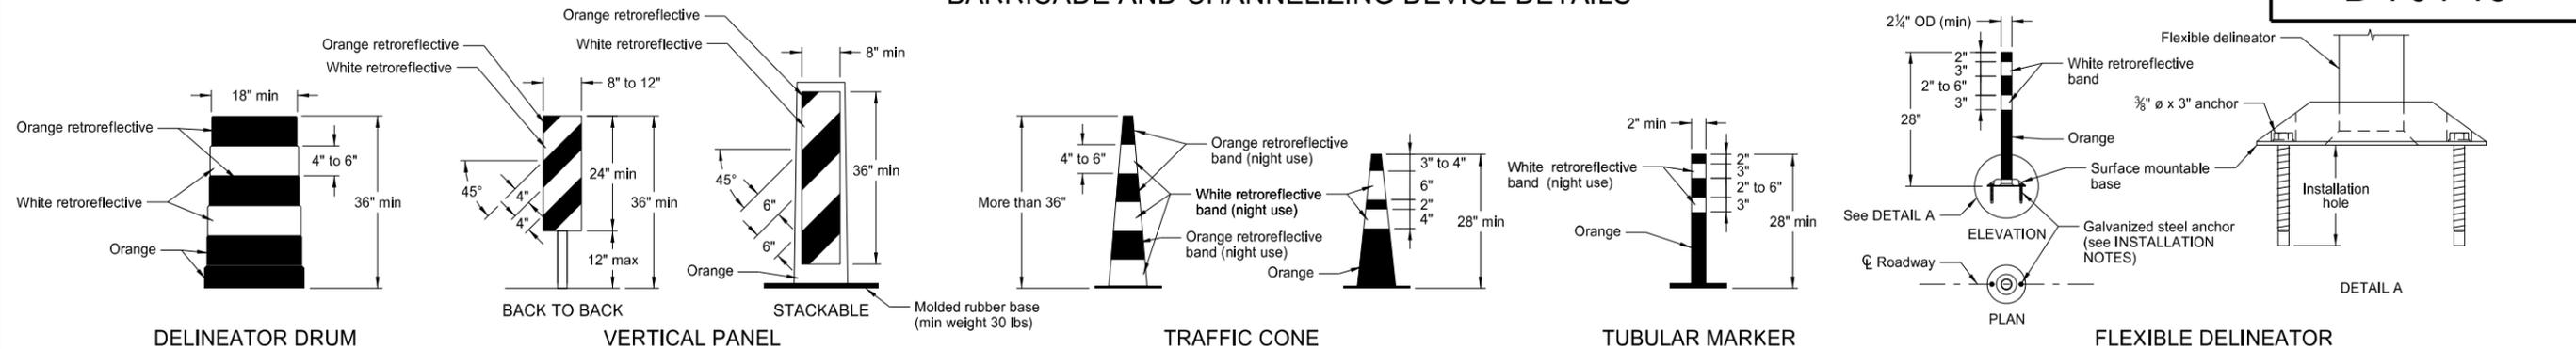


- INSTALLATION NOTES:**
1. Drill installation holes to diameter and depth as required by manufacturer's specifications.
 2. For removal, remove anchors and fill installation hole with an epoxy designed to bond to pavement surface.
 3. In lieu of bolted down base, the contractor may use an 8" x 8" butyl pad or hot melt butyl. Butyl shall be removed as close as possible to pavement surface.

The markings on drums shall be horizontal, circumferential, alternating orange and white retroreflective stripes 4" to 6" wide. Each drum shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED spaces between the horizontal orange and white stripes shall not exceed 3" wide. Stripes shall not be placed on ribs or indentations in the drum. Drums shall have closed tops that will not allow collection of construction debris or other debris. Ballast shall not be placed on the top of a drum.

Markings for vertical panels shall be alternating orange and white retroreflective stripes, sloping downward in the direction vehicular traffic is to pass. Retroreflective sheeting shall be placed on both sides of panel and shall have a minimum of 270 square inches of retroreflective area facing vehicular traffic. Where the height of the retroreflective material on the vertical panel is 36 inches or more, a stripe width of 6 inches shall be used.

RetroreflectORIZATION of cones more than 36" in height shall be provided by alternating orange and white retroreflective stripes. Each cone shall have a minimum of two orange and two white stripes with the top stripe being orange. Any nonretroreflectORIZED space between the orange and white stripes shall not exceed 3" wide.

RetroreflectORIZATION of tubular markers more than 42" in height shall be provided by alternating four 4" to 6" wide orange and white stripes with the top stripe being orange.

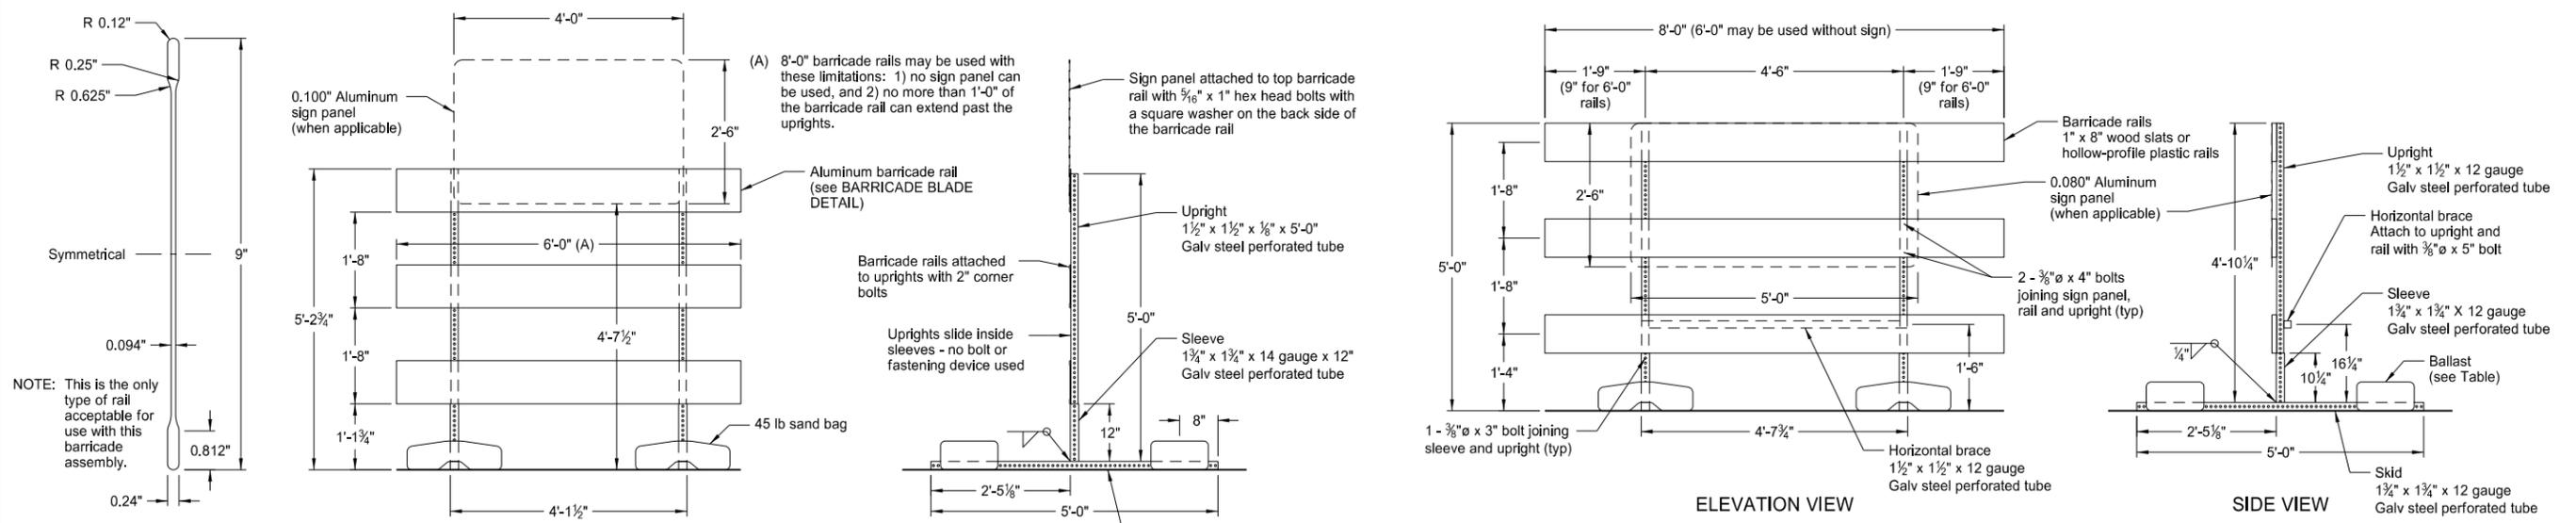


BARRICADE BLADE DETAIL

BARRICADE ASSEMBLY DETAIL (Aluminum Barricade Rails)

BARRICADE ASSEMBLY DETAIL (Wood or Plastic Rails)

NOTE: Markings for barricades shall be alternating orange and white retroreflective stripes, sloping downward in the direction traffic is to pass. Retroreflective sheeting shall be placed on both sides of the rails and shall have a minimum of 270 square inches of visible retroreflective area facing vehicular traffic. When the barricade length is less than 36", the rail stripe width shall be 4".

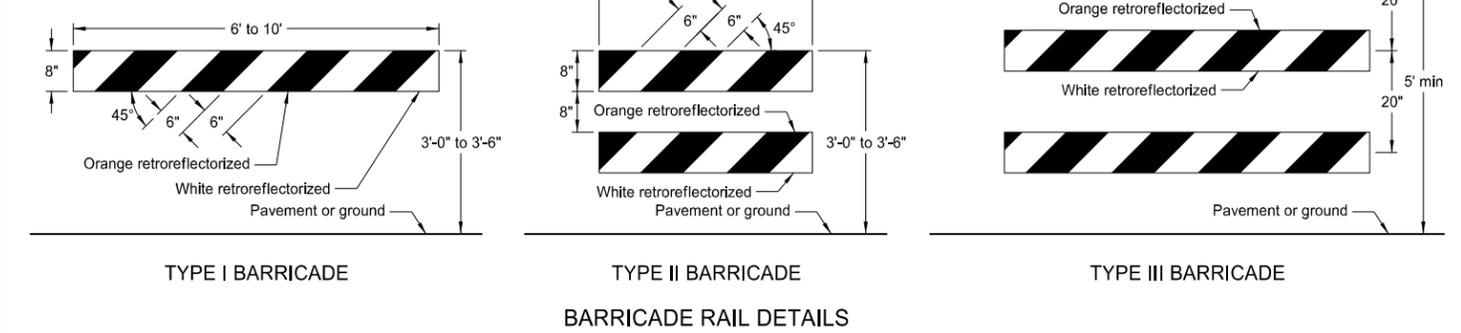


TYPE I BARRICADE

TYPE II BARRICADE

TYPE III BARRICADE

BARRICADE RAIL DETAILS

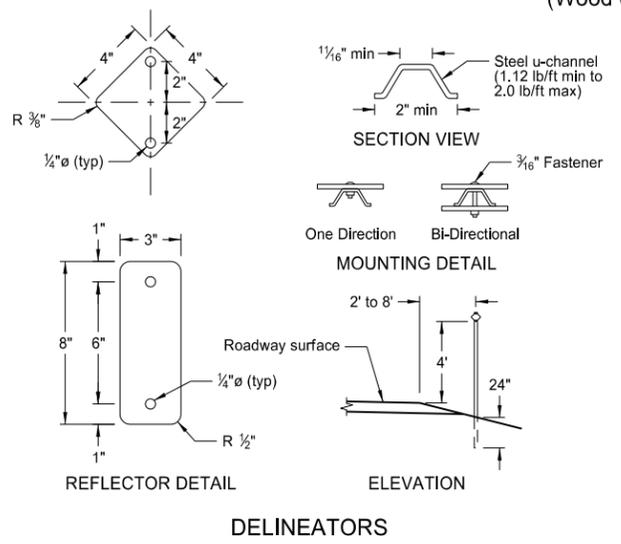

REFLECTOR DETAIL

ELEVATION

DELINEATORS

MINIMUM BALLAST (For each side of barricade support)

Without Sign	4 - 25 lb sandbags
With Sign	6 - 25 lb sandbags


Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-3-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 10/3/13 and the original document is stored at the North Dakota Department of Transportation

CONSTRUCTION SIGN PUNCHING AND MOUNTING DETAILS


Note: Signs placed in sections with curb shall have a minimum horizontal clearance of 2' from the face of the curb to the near edge of the sign.

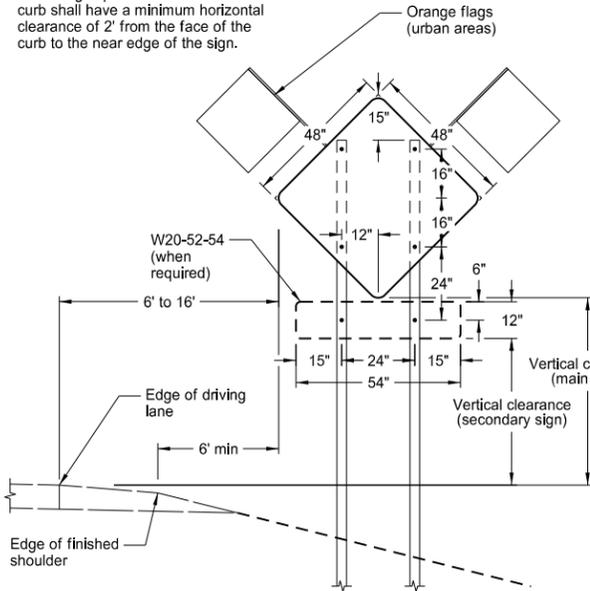


TYPICAL SECTION (48" x 48" diamond warning sign shown)

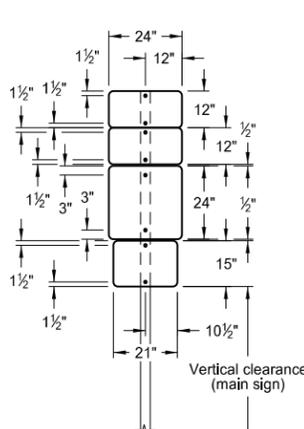


24" x 24" ROUTE MARKER ASSEMBLY

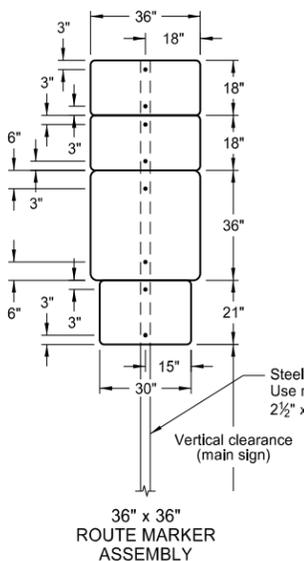
















36" x 36" ROUTE MARKER ASSEMBLY

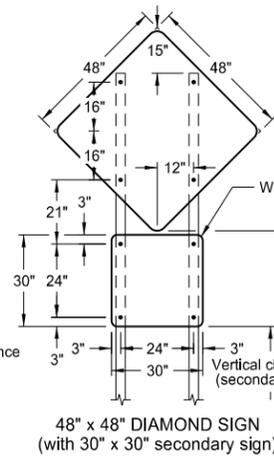


48" x 48" DIAMOND SIGN (with 30" x 30" secondary sign)

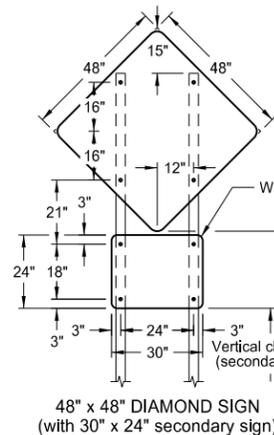

48" x 48" DIAMOND SIGN (with 30" x 24" secondary sign)

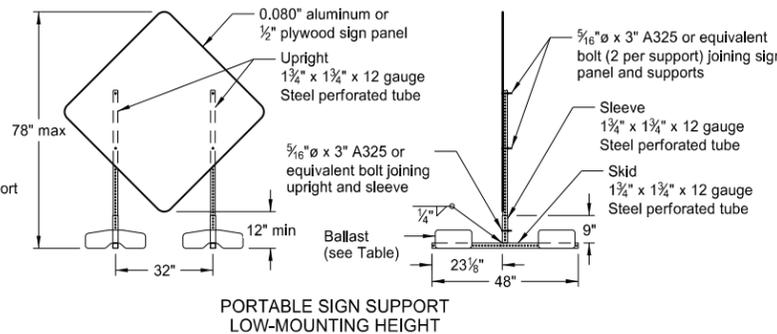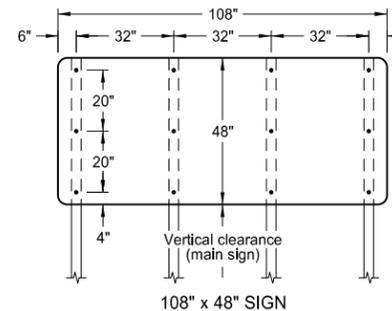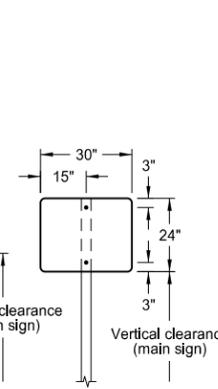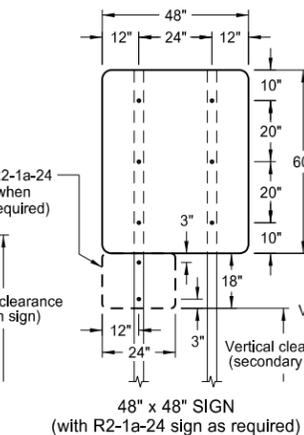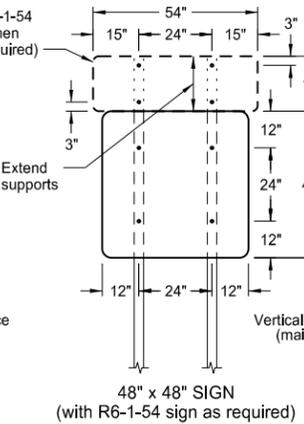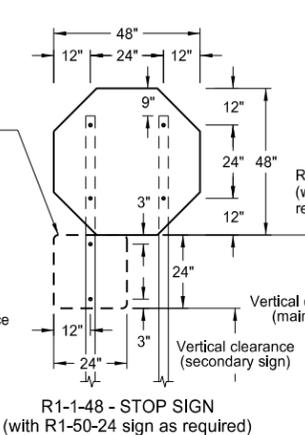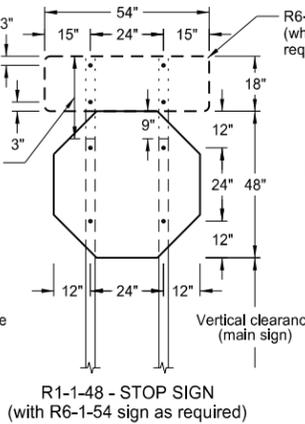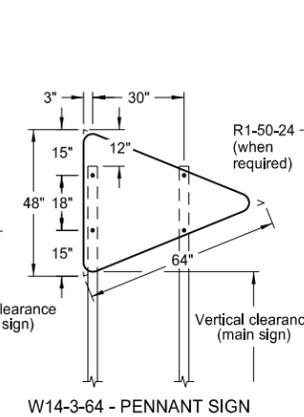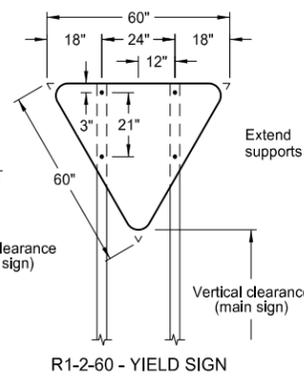

PORTABLE SIGN SUPPORT LOW-MOUNTING HEIGHT

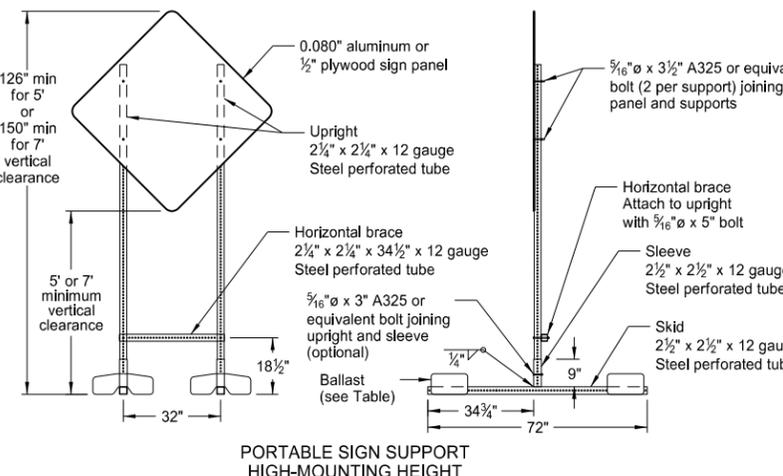

PORTABLE SIGN SUPPORT HIGH-MOUNTING HEIGHT

NOTES:

- Sign Supports: Supports shall be galvanized or painted. Minimum post sizes are 2.5 lb/ft u-channel or 2" x 2" x 12 gauge steel perforated tube, except where noted. When installing signs on u-channel, the minimum post size for assemblies containing a secondary sign is 3.0 lb/ft. Post sizes are based on a wind speed of 55 MPH.
Signs over 50 square feet should be installed on 2 1/2" x 2 1/2" perforated tube supports as a minimum.
Guy wires shall not be attached to sign supports. Wind beams may be attached to u-posts behind the sign panels.
- Sign Panels: Provide sign panels made of 0.100" aluminum, 1/2" plywood, or other approved material, except where noted. All holes to be punched round for 3/8" bolts.
- Alternate Messages: The signs that have alternate messages may have these alternate messages placed on a reflectorized plate (without a border) and installed and removed as required. (i.e. "Left" and "Right" message on a lane closure sign)
- Route Marker Auxiliary Signs: Provide route marker auxiliary signs, such as the cardinal direction and directional arrows, with a background and legend that match the route marker they are used with:
Interstate - white legend on blue background
Interstate Business Loop - white legend on green background
US and State - black legend on white background
County - yellow legend on blue background
- Vertical Clearance: Install signs with a vertical clearance of 5'-0" (see TYPICAL SECTION.) In areas where parking or pedestrian movements are likely or the view of the sign may be obstructed, install signs with a vertical clearance of 7'-0" from the top of the curb or from the near edge of the driving lane in absence of a curb.
The vertical clearance to secondary signs is 1'-0" less than the vertical clearance as stated above.
Large signs having an area exceeding 50 square feet shall have a minimum clearance of 7'-0" from the ground at the post.
- Portable Signs: Provide portable signs that meet the vertical clearance as stated above. Use portable signs when it is necessary to place signs within the pavement surface.
When portable signs are used for 5 days or less, low-mounting height (minimum 12" vertical clearance) sign supports may be used as long as the view of the sign is not obstructed. Time delays caused by unforeseen circumstances, such as equipment breakdown, rain, subgrade failures, etc., will not accrue towards the 5 day period. The R9-8 through R9-11a series, W1-5 through W1-8 series, M4-10, and E5-1 may be used for longer than 5 days.
Signs mounted to the portable sign supports shown in the LOW-MOUNTING HEIGHT and HIGH-MOUNTING HEIGHT Details shall have a maximum surface area of 16 square feet.

MINIMUM BALLAST (For each side of sign support base)

Sign Panel Mounting Height (ft)	Number of 25 lb sandbags for 4' x 4' sign panel
1'	6
5'	8
7'	10

Note: The number of sandbags are based on a wind speed of 55 MPH. The sandbags are assumed to be placed at or near the ends of the skids.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
10-4-13	
REVISIONS	
DATE	CHANGE
11-14-13	Revised Note 6.

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 11/14/13 and the original document is stored at the North Dakota Department of Transportation

ROAD CLOSURE LAYOUTS

Notes

- Variables
 - S = Numerical value of speed limit or 85th percentile.
 - W = The width of taper.
 - L = Minimum length of taper, or $S \times W$ for freeways, expressways, and all other roads with speeds of 45 mph or greater, or $W \times S^2/60$ for urban, residential, and other streets with speeds of 40 mph or less.
- Barricades placed on roadway shall be on a moveable assembly. Signs placed on roadway shall be placed on skid mounted assemblies.
- Delineator drums, barricades or cones used for tapering traffic shall be spaced at the dimension "S". Delineator drums or cones used for tangents shall be spaced at 2 times dimension "S".
- Sequencing Arrow Panels
 - Panels should normally be placed at the beginning of the taper. Where shoulder width does not provide sufficient room, the panel should be moved closer to the work area so that it can be placed on the roadway surface. See Shoulder Closure Standard Drawing.
 - Type A shall be used on roadways with slow moving traffic speeds and low volume (25 mph or less and 750 ADT or less).
 - Type B shall be used on roadways with moderate traffic speeds and volumes (40 mph or less and 5000 ADT or less).
 - Type C shall be used on roadways with high traffic speeds and volumes (over 40 mph or over 5000 ADT).
- The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
- The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at $\frac{1}{2}$ B.
- Use when work area is 1 mile or longer.
- When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
- Existing speed limit signs within a reduced speed zone shall be covered.
- Where necessary, safe speed to be determined by the Engineer.
- The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
- G20-55-96 sign is not required if this standard is part of other traffic control layouts, or the work is less than 15 days.

Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

KEY

	Type III barricade		Work area
	Sign		Flagger
	Delineator drum		Sequencing arrow panel
	Tubular markers		Vertical panels back to back


Longitudinal Buffer Space

Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820

NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
9-27-13

REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE-2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation

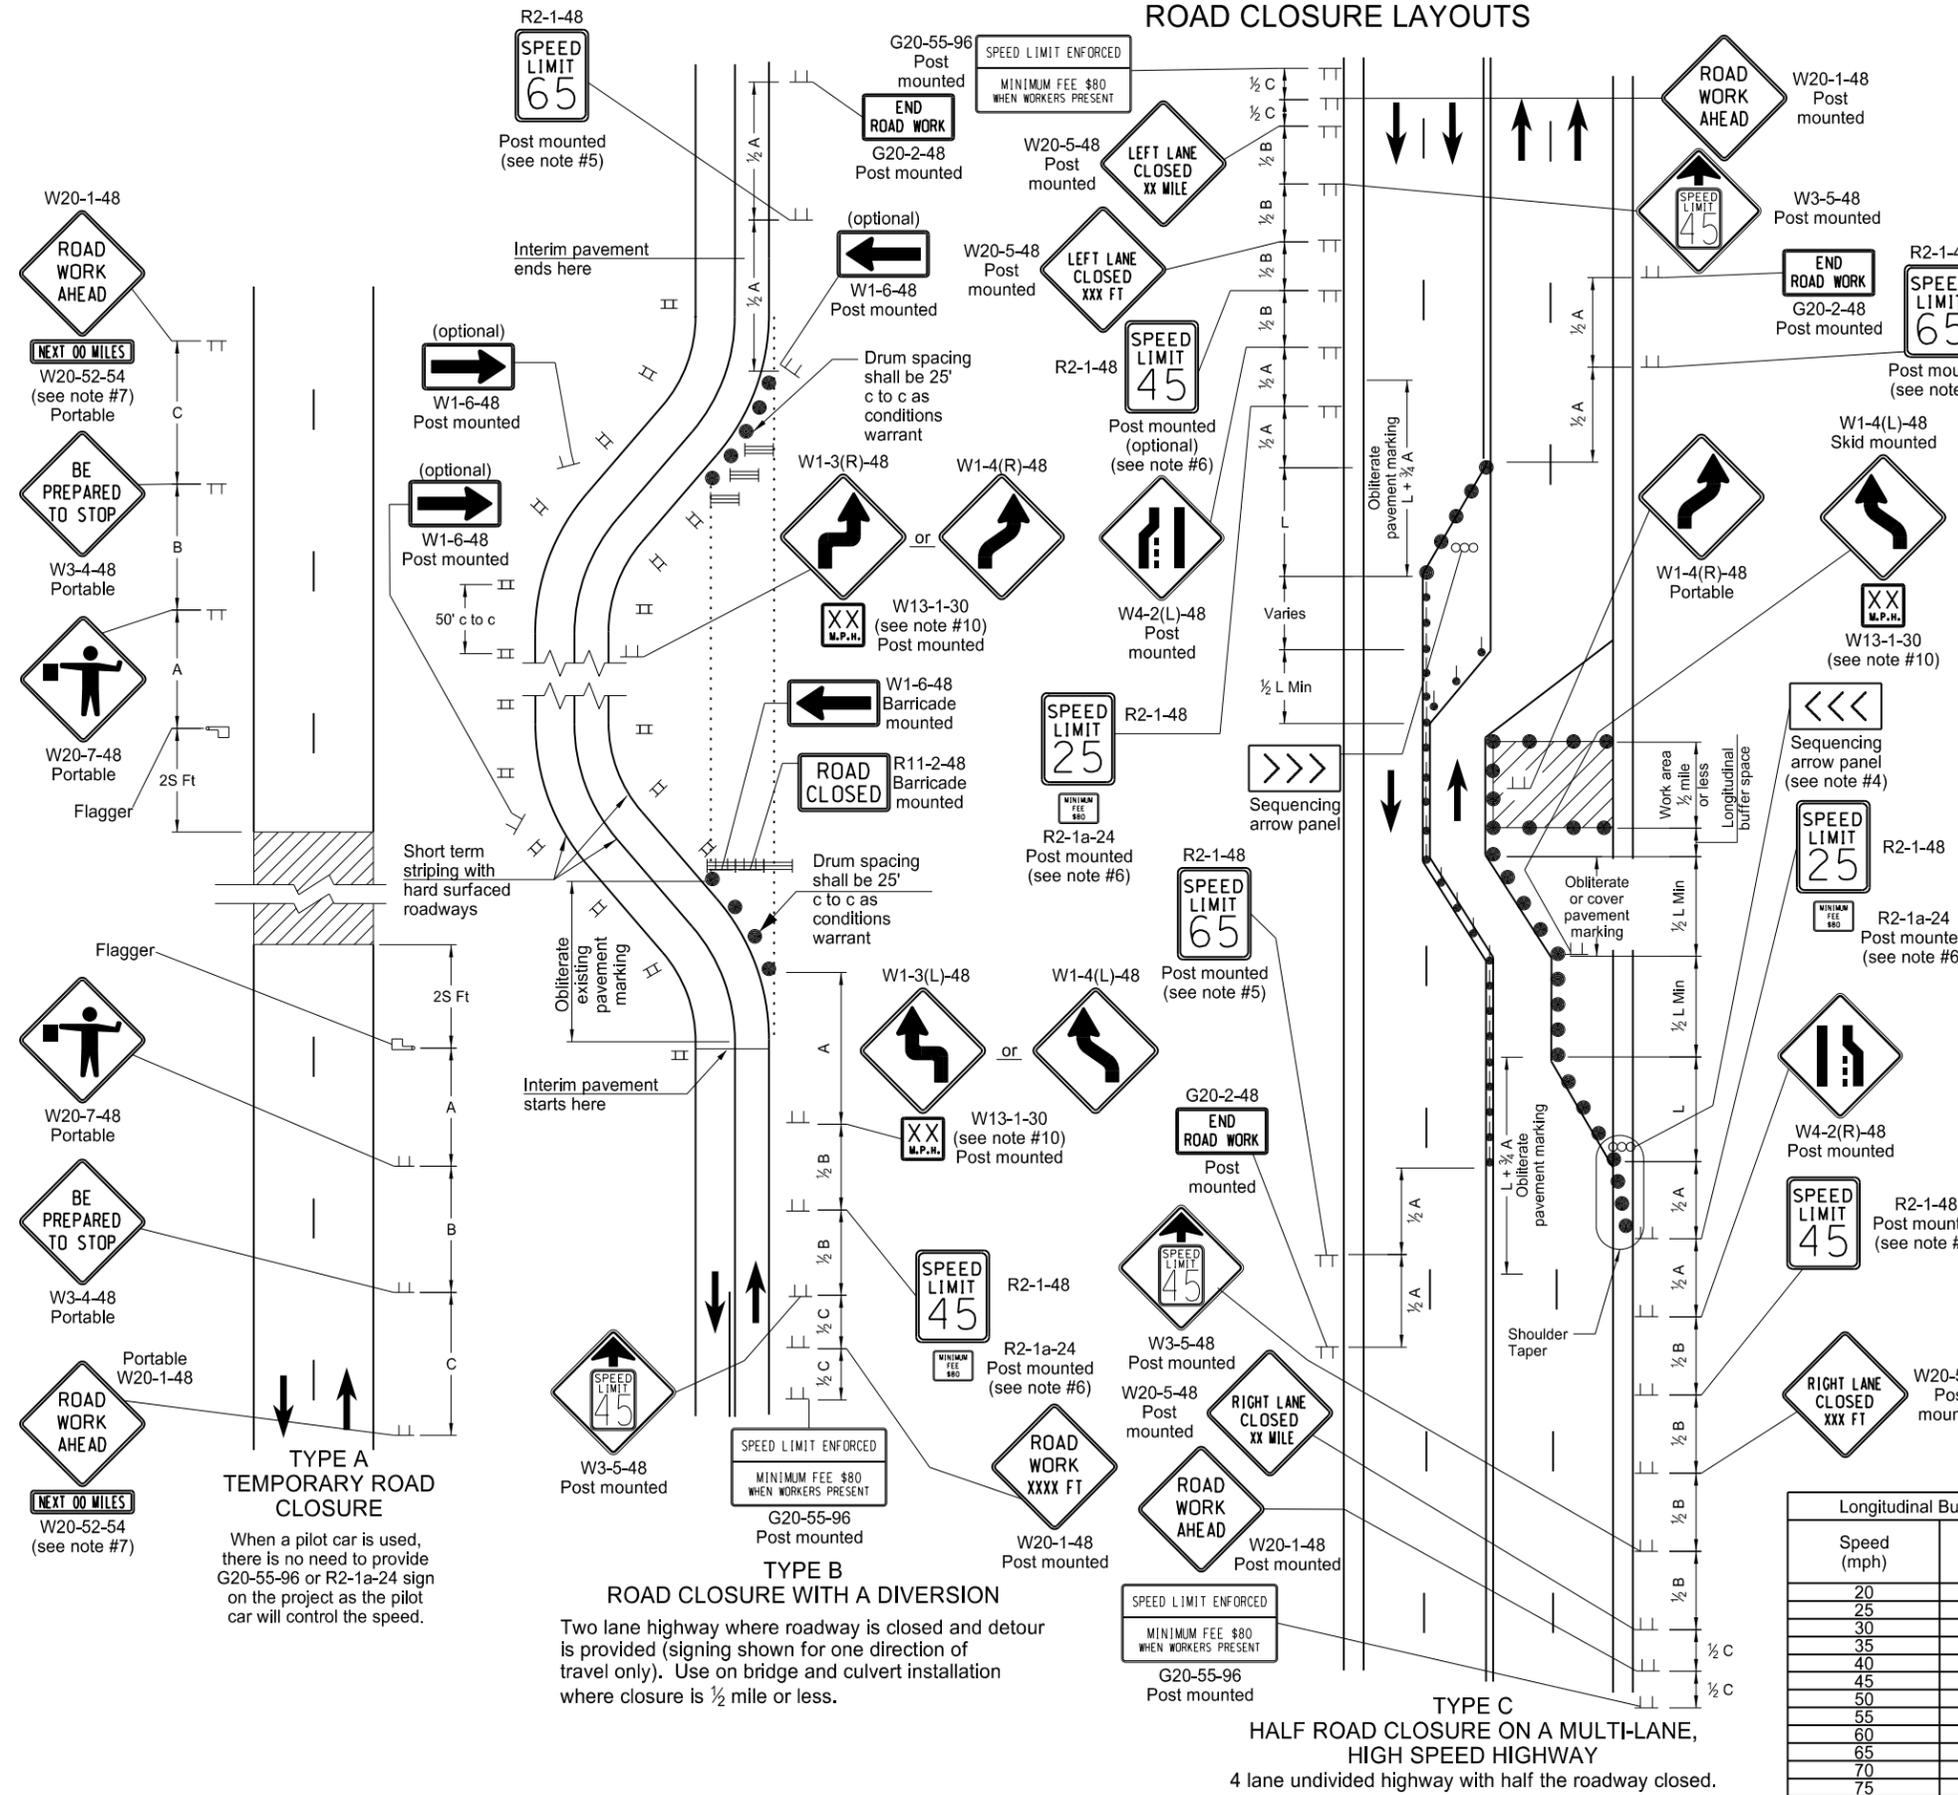


**TYPE A
TEMPORARY ROAD CLOSURE**
 When a pilot car is used, there is no need to provide G20-55-96 or R2-1a-24 sign on the project as the pilot car will control the speed.

**TYPE B
ROAD CLOSURE WITH A DIVERSION**
 Two lane highway where roadway is closed and detour is provided (signing shown for one direction of travel only). Use on bridge and culvert installation where closure is $\frac{1}{2}$ mile or less.

**TYPE C
HALF ROAD CLOSURE ON A MULTI-LANE,
HIGH SPEED HIGHWAY**
 4 lane undivided highway with half the roadway closed.

TERMINAL AND SEAL COAT SIGN LAYOUTS

D-704-20

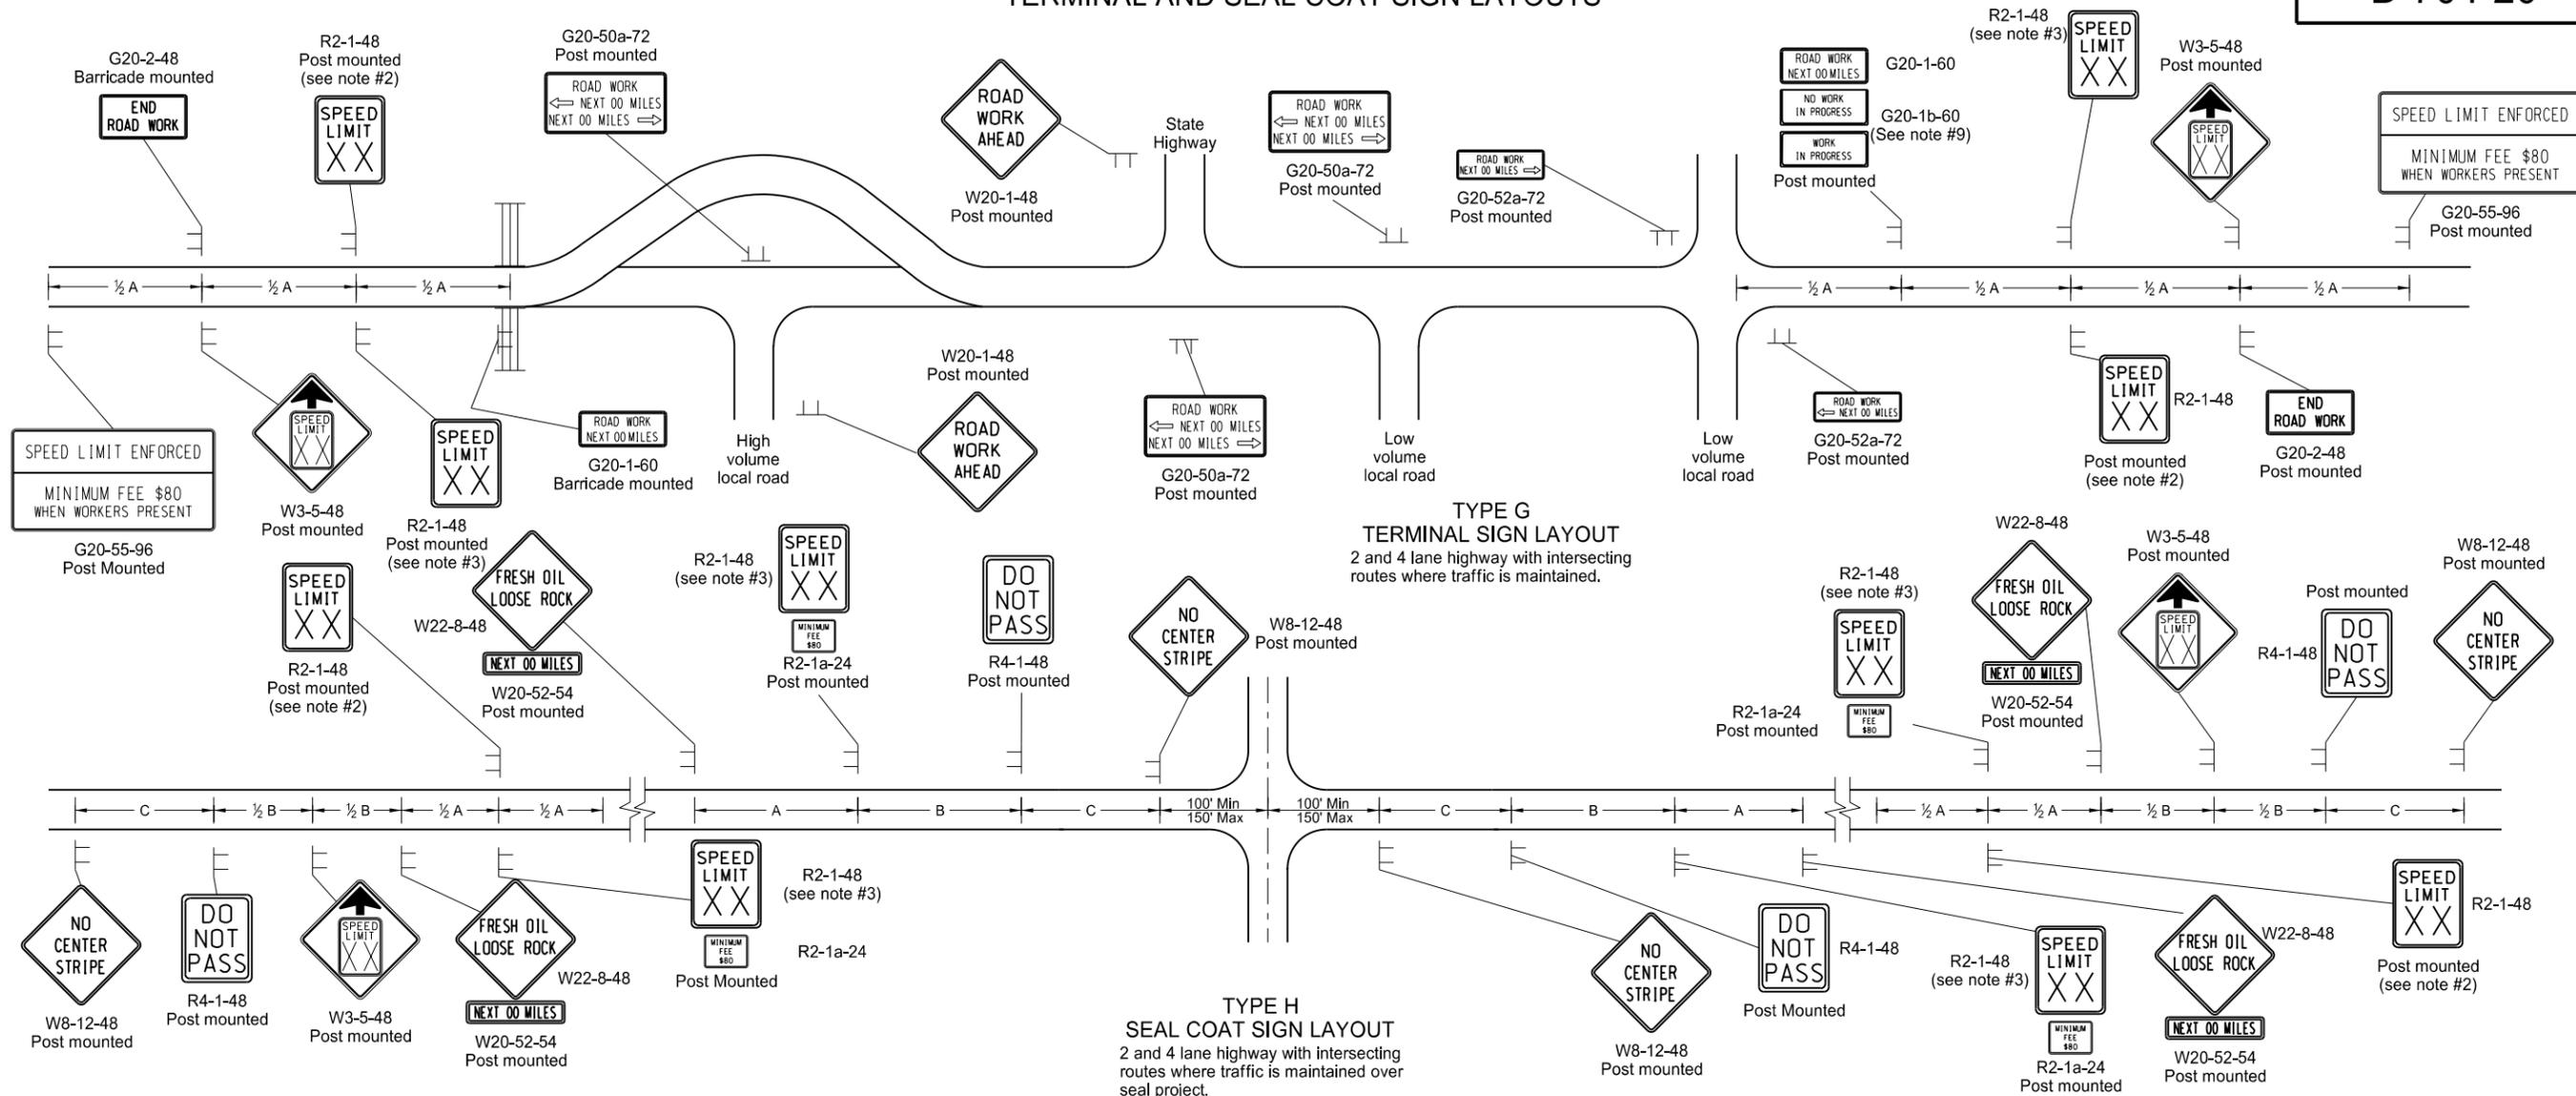

1. Barricades placed on roadway shall be on a moveable assembly. Signs placed on the roadway shall be placed on skid mounted assemblies.
2. The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
3. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 MPH below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 MPH. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at 1/2 B.
4. When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
5. Existing speed limit signs within a reduced speed zone shall be covered.
6. On seal projects, signs R2-1-48, R2-1a-24, R4-1-48, W22-8-48 and W20-52-54 shall be placed just after all important intersections and at five mile intervals thereafter. Sign W8-12-48 shall be placed just after all important intersections and at 2 mile intervals thereafter until the short term center line pavement marking is in place. No short term pavement markings are placed when traffic volumes are 750 ADT or less.
7. The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
8. Type H construction sign traffic control shall have the speed limit signs covered or removed once the loose aggregate has been removed.
9. The contractor shall install the G20-1b-60 sign when work is suspended for winter.
10. Other traffic control layouts will be required in the immediate work areas. If the speed limit is reduced in the work area, speed limit signs shall have the R2-1a-24 sign placed below.
11. G20-55-96 sign is not required if work is less than 15 days.

KEY

Type III barricade
 Sign

ADVANCE WARNING SIGN SPACING			
Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500


NORTH DAKOTA
DEPARTMENT OF TRANSPORTATION
9-27-13

REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
Roger Weigel
 Registration Number
PE-2930,
 on **09/27/13** and the original document is stored at the
 North Dakota Department
 of Transportation

CONSTRUCTION TRUCK AND TEMPORARY DETOUR LAYOUTS

D-704-22

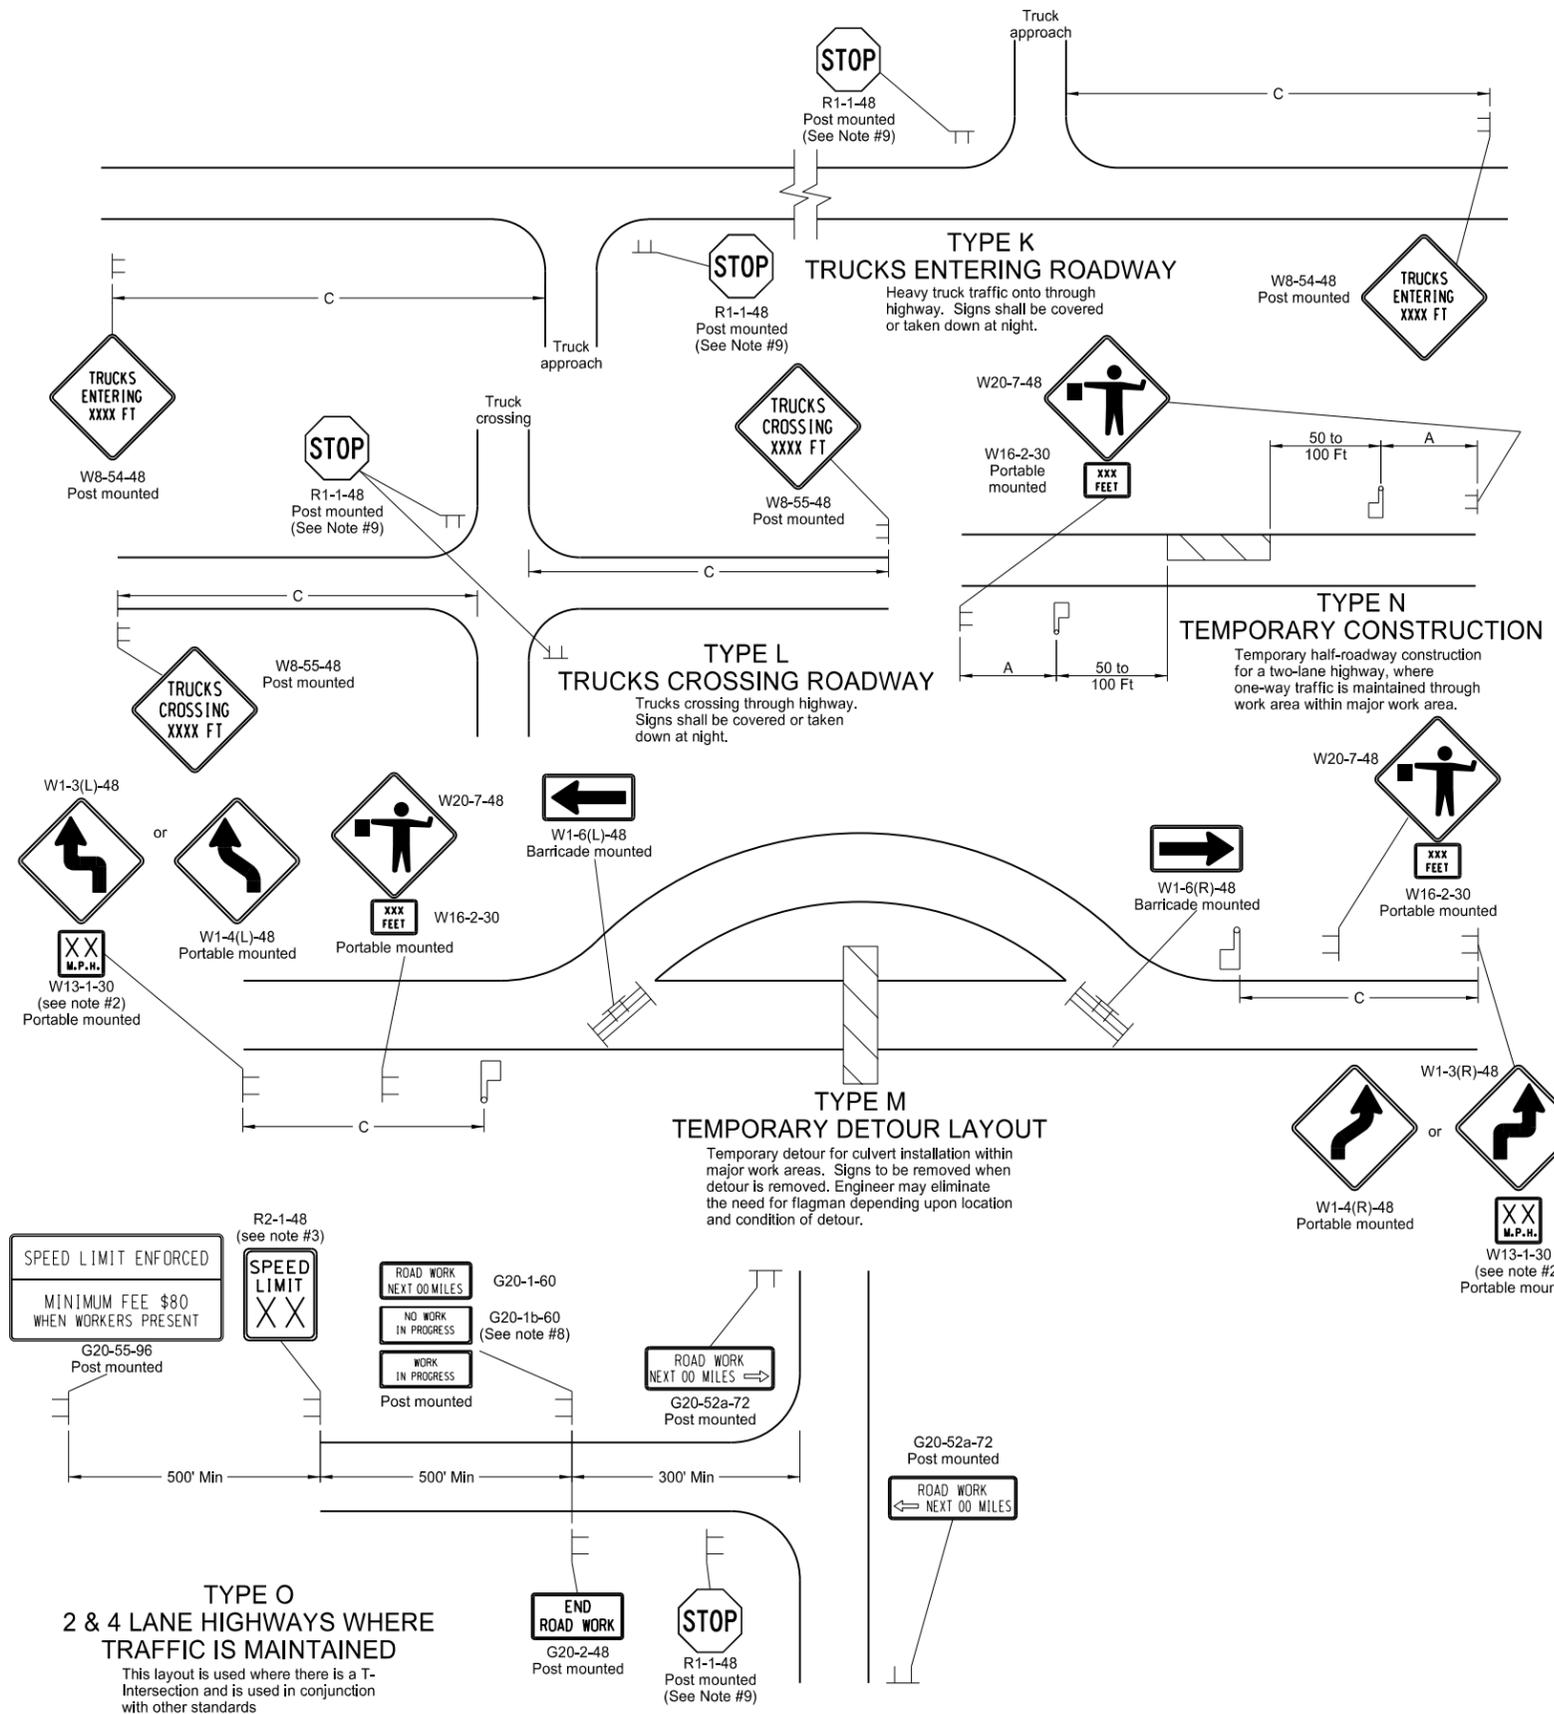

- Notes
1. Barricades placed on roadway shall be on a moveable assembly. Signs placed on the roadway shall be placed on skid mounted assemblies. Where necessary, safe speed to be determined by the Engineer.
 2. The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at 1/2 B.
 3. When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 4. Existing speed limit signs within a reduced speed zone shall be covered. Obliterated or covered pavement marking shall be paid for as Obliteration of Pavement Marking. The covering shall be approved by the engineer.
 5. The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
 6. The contractor shall install the G20-1b-60 sign when work is suspended for winter.
 7. If existing stop sign is in place, a 48" stop sign is not required.
 8. G20-55-96 sign is not required if this standard is part of other traffic control layouts with this sign or the work is less than 15 days.

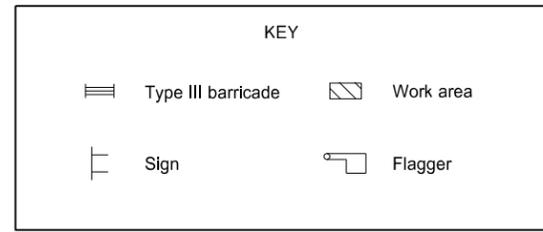


Road Type	ADVANCE WARNING SIGN SPACING		
	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by
 Roger Weigel
 Registration Number
 PE- 2930,
 on 09/27/13 and the original document is stored at the
 North Dakota Department
 of Transportation

MISCELLANEOUS SIGN LAYOUTS


D-704-26

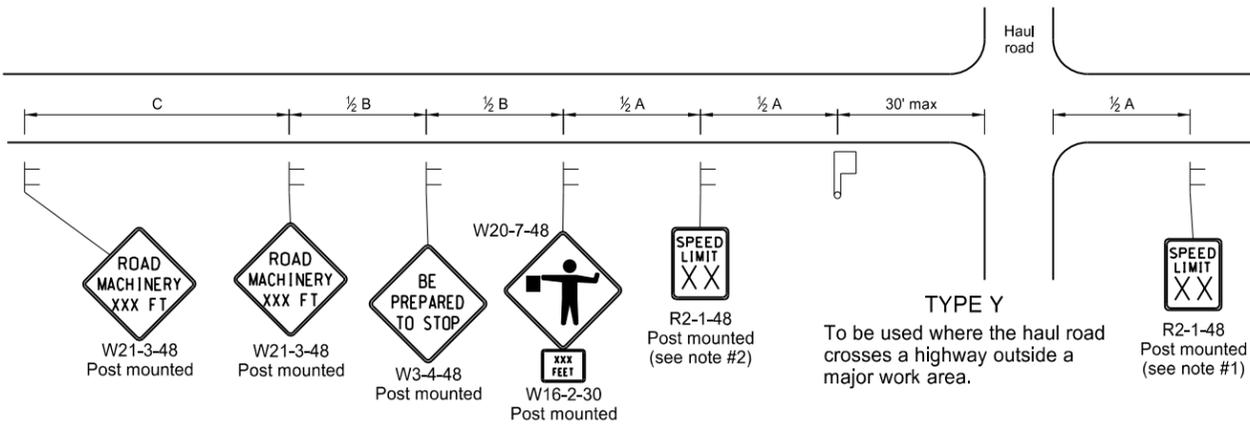

TYPE Y
To be used where the haul road crosses a highway outside a major work area.

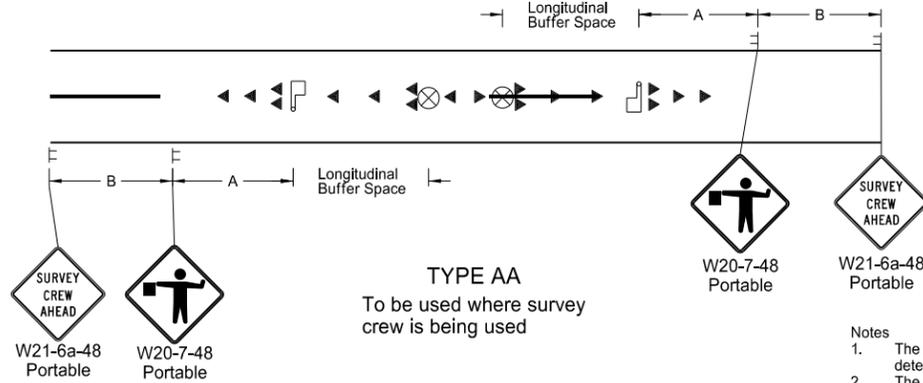


TYPE AA
To be used where survey crew is being used

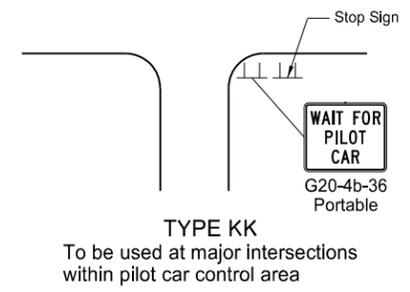


TYPE KK
To be used at major intersections within pilot car control area


- Notes
- The speed limit shall be re-established. The exact speed limit shall be determined in the field, dependent on location and conditions.
 - The reduced speed limit shall be determined dependent on the in place speed limit before construction. The speed limit reduction should not exceed 10 mph below the existing speed limit, unless the design speed of the work zone feature has been reduced below the 10 mph. In this case, the speed limit reduction shall not exceed 30 MPH. Where speed limits are to be reduced more than 30 MPH, a second speed limit sign shall be installed with the desired speed reduction but shall not exceed 30 MPH. The second speed limit sign shall be placed at 1/2 B.
 - When warning signs are used in urban areas and the signs are not portable, flags shall be installed. The flags shall be 24 inches square, mounted perpendicular to the edges of the diamond sign, and at such a distance above the edge so that when the flag is limp it will not touch the sign. Rural areas will not require flags.
 - Existing speed limit signs within a reduced speed zone shall be covered.
 - The contractor has the option of using portable sign supports in lieu of post mounted signs in accordance with the NDDOT Standard Specifications.
 - G20-55-96 signs are not required if this standard is part of other traffic control layouts, or the work is less than 15 days.
 - When a pilot car operation is used, place a G20-4b-36 "Wait For Pilot Car" sign at major intersections within pilot car control area.

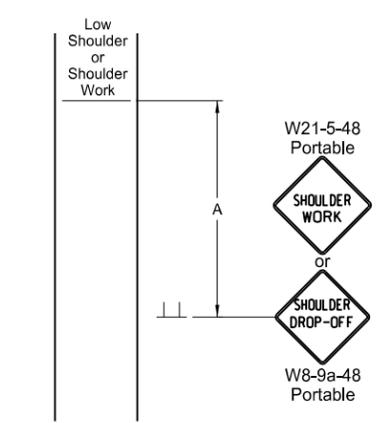


TYPE BB
To be used within a major work area where the sign conditions exist

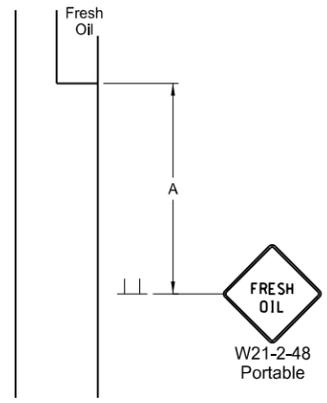


TYPE CC
To be used where the sign conditions exist

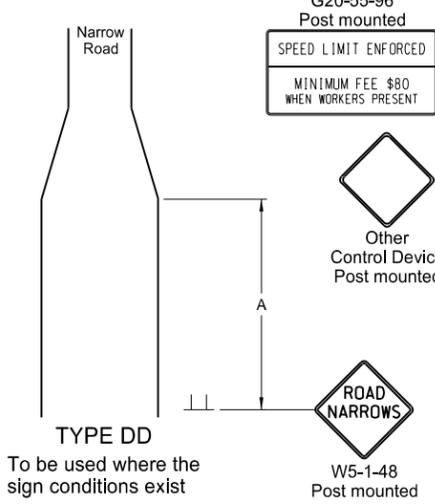

TYPE DD
To be used where the sign conditions exist

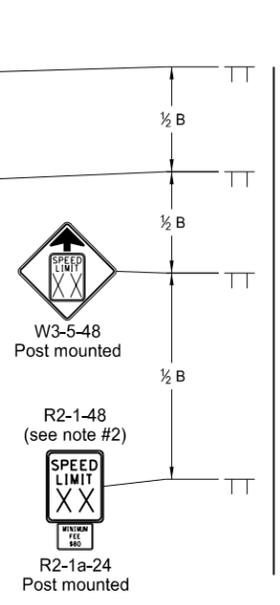


TYPE Z
To be used where speed zone is needed

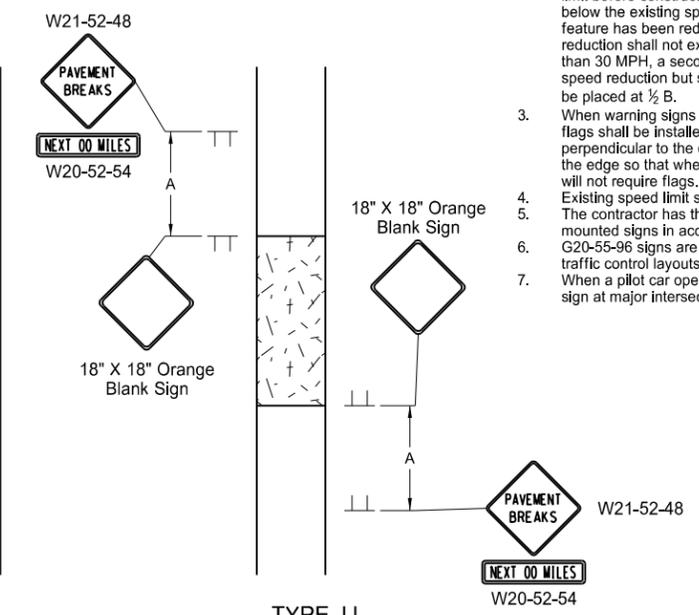


TYPE JJ
To be used where there is a break in the pavement. These signs may be skid mounted or post mounted and shall be installed when conditions exist and removed when not applicable.

Longitudinal Buffer Space	
*Speed (mph)	Length Min (feet)
20	115
25	155
30	200
35	250
40	305
45	360
50	425
55	495
60	570
65	645
70	730
75	820


* Posted speed, off-peak 85th percentile speed prior to work starting, or the anticipated operating speed in mph.

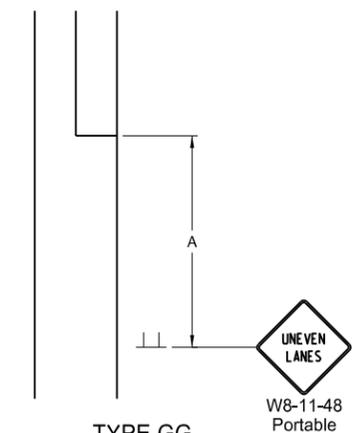

TYPE GG
To be used where a difference of elevation between lanes exist

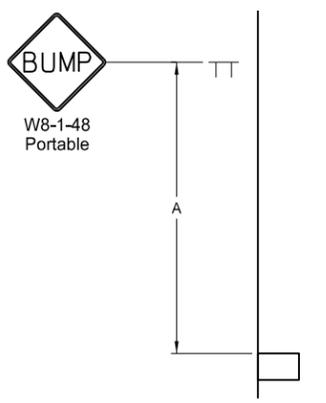

TYPE EE
To be used where the sign conditions exist

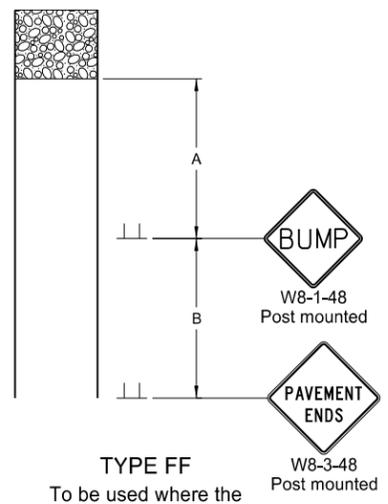

TYPE FF
To be used where the sign conditions exist

Road Type	Distance Between Signs Min. (ft)		
	A	B	C
Urban - Low Speed (30 mph or less)	150	150	150
Urban - Low Speed (over 30 to 40 mph)	280	280	280
Urban - High Speed (over 40 mph to 50 mph)	360	360	360
Rural - High Speed (over 50 mph to 65 mph)	720	720	720
Urban Expressway and Freeway (55 mph to 60 mph)	850	1350	2200
Rural Expressway and Freeway (70 mph to 75 mph)	1000	1500	2640
Interstate/4-Lane Divided (Maintenance and Surveying)	750	1000	1500

KEY

Sign (represented by a vertical line with a horizontal bar)

Flagger (represented by a square with a diagonal line)








Cones (represented by a triangle)

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE


This document was originally issued and sealed by Roger Weigel Registration Number PE-2930, on 09/27/13 and the original document is stored at the North Dakota Department of Transportation

TRAFFIC CONTROL PLAN FOR MOVING OPERATIONS

D-704-27

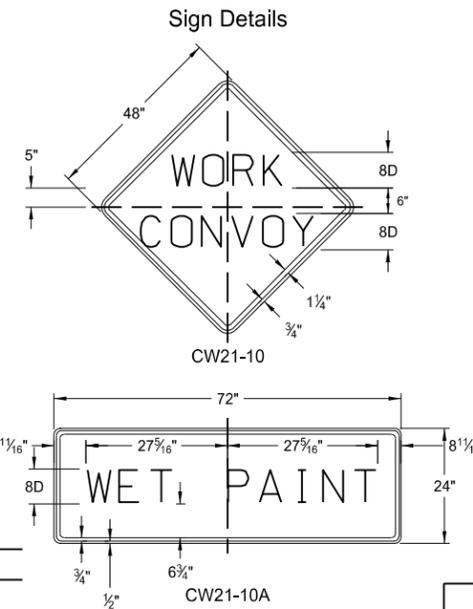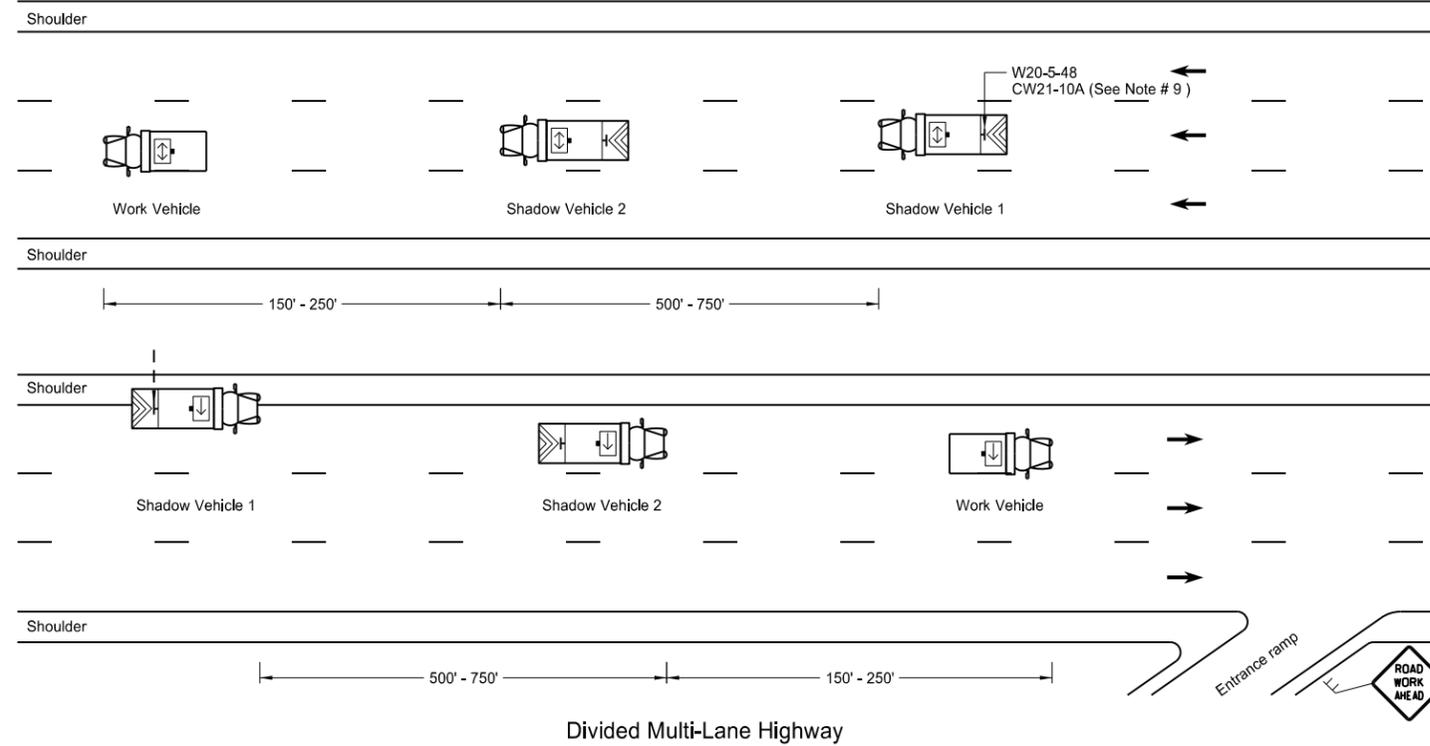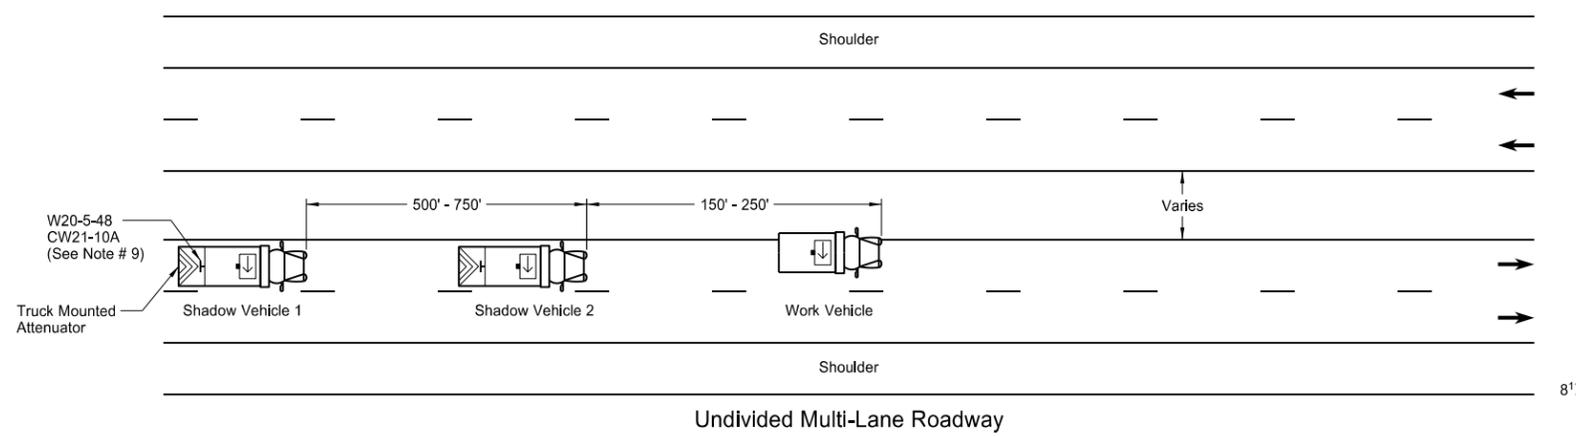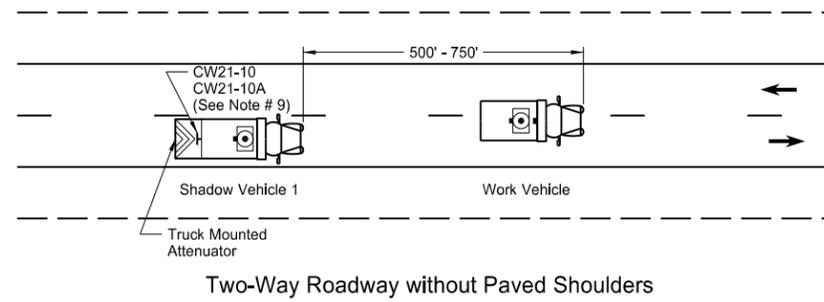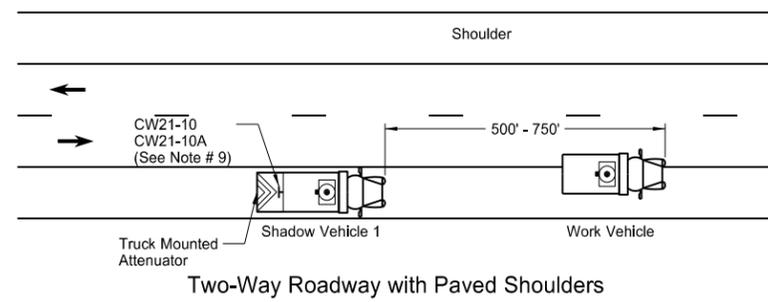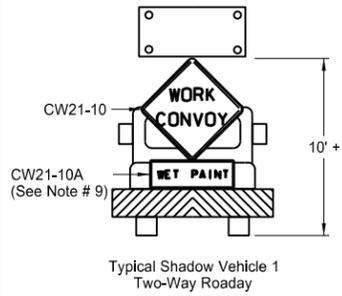

- Notes
- If the contractor chooses to place more vehicles in the convoy than are shown, these vehicles shall have the truck mounted attenuator and shall be at the contractor's expense.
 - Shadow and work vehicles shall display yellow rotating beacons or strobe lights unless otherwise stated elsewhere in the plans.
 - Flashing arrow panels shall be Type B or Type C. The panel operation shall be controlled from inside the vehicle.
 - Each vehicle shall have two-way electronic communication capability.
 - When work convoys must change lanes, shadow vehicle 1 should change lanes first to shadow other convoy vehicles.
 - Vehicle spacing between the shadow vehicle 1 and shadow vehicle 2 will vary depending on sight distance restrictions. Motorists approaching the work convoy should be able to see the trail vehicle in time to slow down and/or change lanes as they approach the shadow vehicle.
 - Sign Colors
Letters = Black
Border = Black
Background = Orange
 - Shadow vehicle 2 may be used as the paint tender vehicle.
 - Sign CW21-10A shall only be used during a painting operation.
 - On two lane - two way roadways, the work and shadow vehicles should pull over periodically to allow motor vehicle traffic to pass.

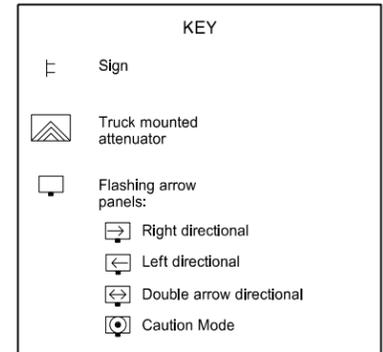


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
9-27-13	
REVISIONS	
DATE	CHANGE
6-18-14	Removed shadow vehicle 2 on two lane roadways


This document was originally issued and sealed by
Roger Weigel
Registration Number
PE-2930,
on 06/18/14 and the original document is stored at the
North Dakota Department
of Transportation

PAVEMENT MARKING


D-762-4

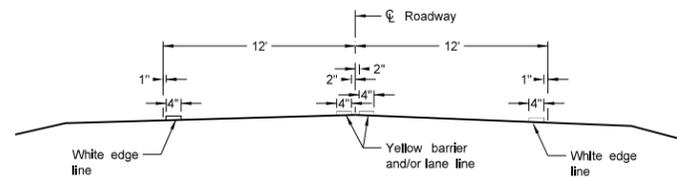


Two Lane Two Way
RURAL ROADWAY

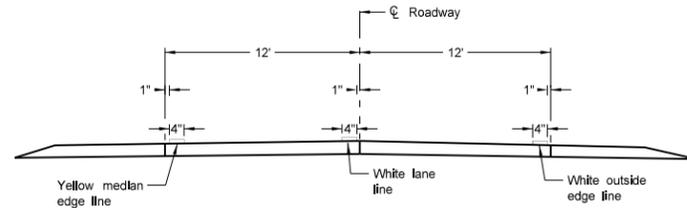


Two Lane Roadway
INTERSTATE HIGHWAY
Concrete Section

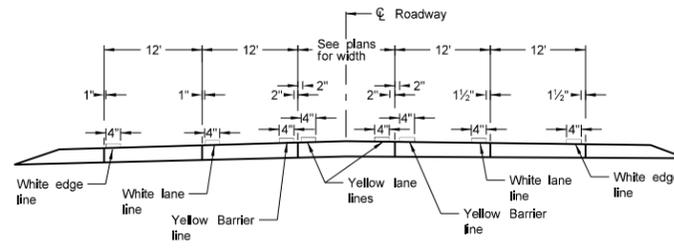


RURAL FIVE LANE ROADWAY
Concrete Section

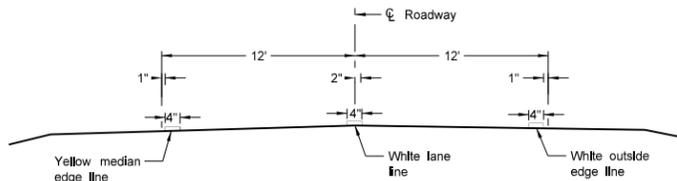


Two Lane Divided
Rural Roadway
PRIMARY HIGHWAY
Asphalt Section

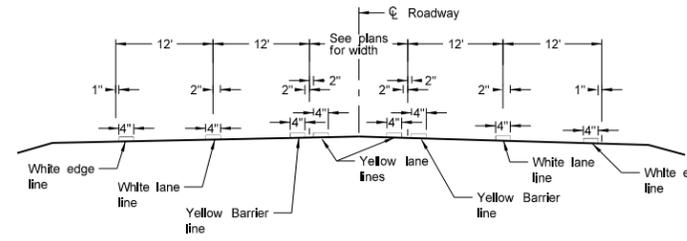


RURAL FIVE LANE ROADWAY
Asphalt Section

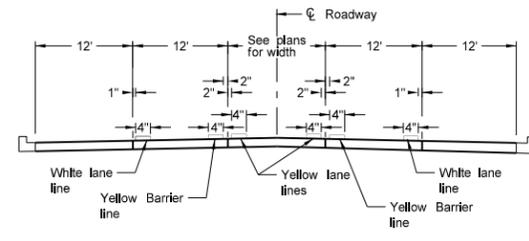


URBAN FIVE LANE SECTION
Concrete Section

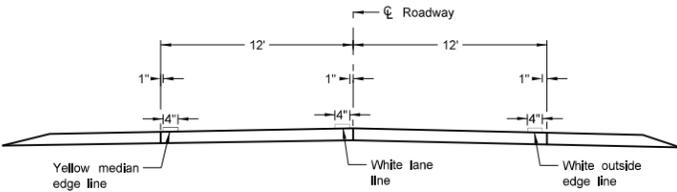


Two Lane Roadway
PRIMARY HIGHWAY
Concrete Section

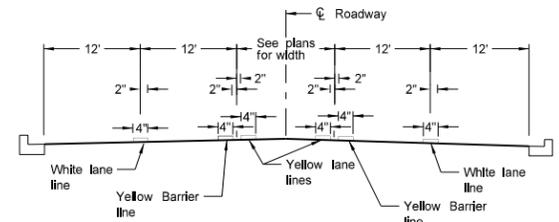


URBAN FIVE LANE SECTION
Asphalt Section

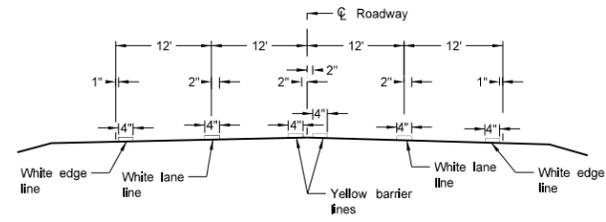


RURAL FOUR LANE ROADWAY
Asphalt Section

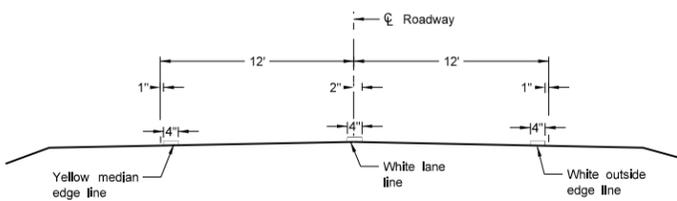


Two Lane Roadway
INTERSTATE HIGHWAY
Asphalt Section

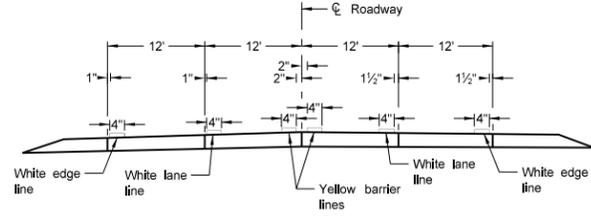


RURAL FOUR LANE ROADWAY
Concrete Section

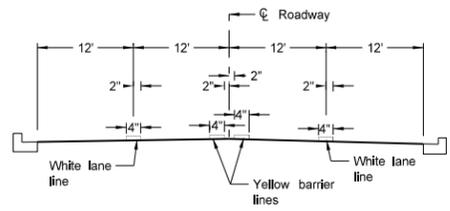

URBAN FOUR LANE SECTION
Asphalt Section

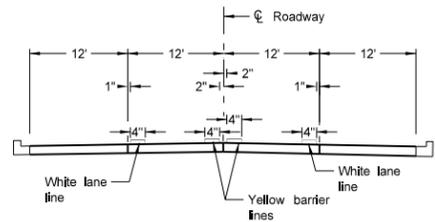

URBAN FOUR LANE SECTION
Concrete Section




CENTERLINE PAVEMENT MARKING SKIP SPACING DETAIL

NOTES:
1. Edge lines shall be continued through private drives and field drives and broken for intersections.


NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation

SHORT-TERM PAVEMENT MARKING

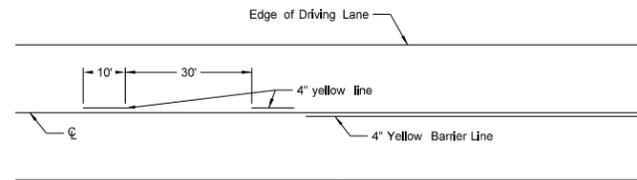


Painted or Tape Lines

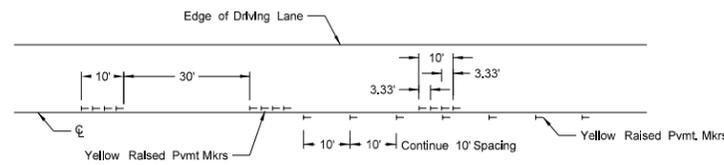


Raised Pavement Markers

TWO-LANE TWO-WAY ROADWAY

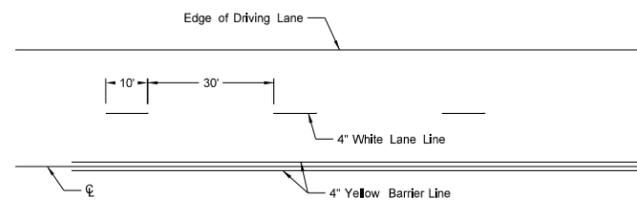


Painted or Tape Lines

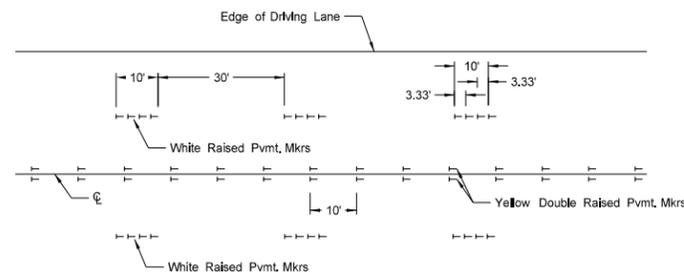


Raised Pavement Markers

FOUR LANE ROADWAY

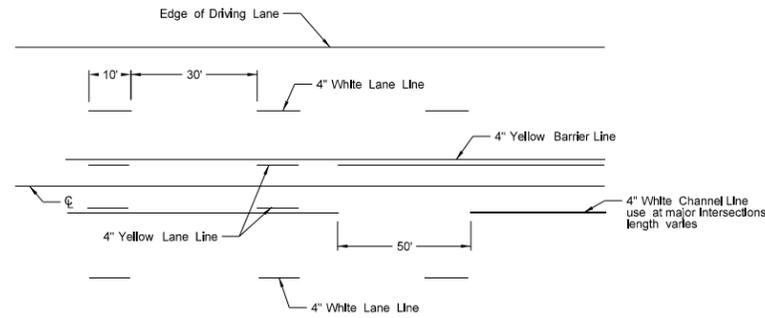


Painted or Tape Lines

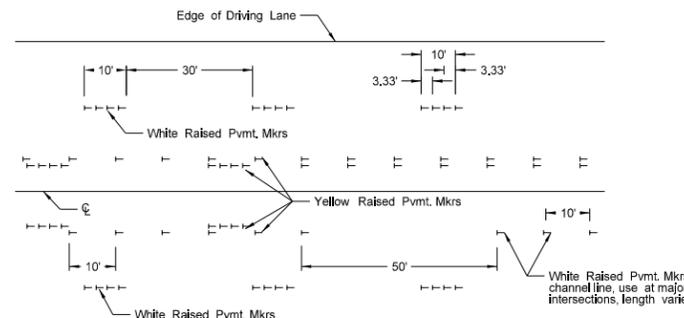


Raised Pavement Markers

FIVE LANE ROADWAY TWO WAY LEFT TURN

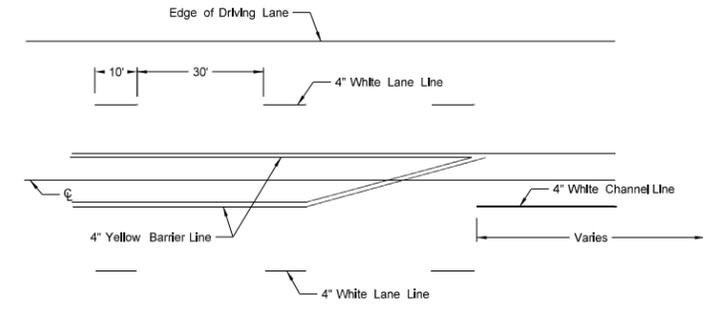

Painted or Tape Lines

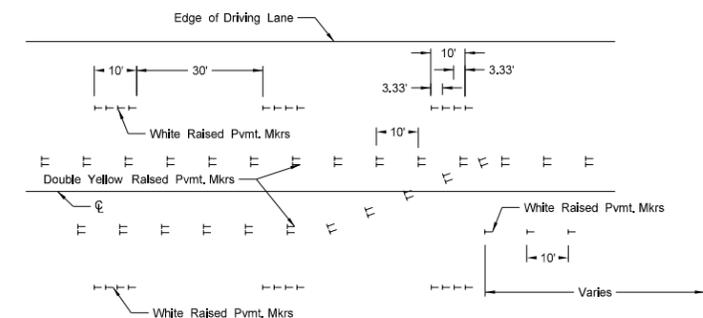

Raised Pavement Markers

FIVE LANE ROADWAY WITH MARKED ISLANDS

NOTES:

- Two-lane two-way roadways shall have no passing zones placed as shown. No passing zone signs may be placed in lieu of short term no passing zone pavement markings. These signs will be allowed to remain in place for three days, at which time the short term no passing zone pavement marking shall be placed.
- Short term center line stripe (paint) on top lift shall be carefully placed with exact spacing so that the permanent stripe will match when applied.
- Raised markers and tape markings shall be removed after permanent pavement marking has been installed. Removed markings shall become the property of the contractor.

NORTH DAKOTA DEPARTMENT OF TRANSPORTATION	
12-1-10	
REVISIONS	
DATE	CHANGE

This document was originally issued and sealed by Roger Weigel, Registration Number PE-2930, on 12-1-10 and the original document is stored at the North Dakota Department of Transportation